

**DAHLGREN DIVISION  
NAVAL SURFACE WARFARE CENTER**

Dahlgren, Virginia 22448-5100

---



**NSWCDD/TR-01/30**

**A SEMIEMPIRICAL METHOD FOR PREDICTING  
AERODYNAMICS OF TRAILING EDGE FLAPS**

**BY FRANK G. MOORE  
AEROPREDICTION, INC.**

**TOM C. HYMER  
NSWCDD**

**WEAPONS SYSTEMS DEPARTMENT**

**JUNE 2001**

Approved for public release; distribution is unlimited.

**20011128 083**

**REPORT DOCUMENTATION PAGE**Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, search existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

|   |   |  |  |  |
|---|---|--|--|--|
| <b>1. AGENCY USE ONLY (Leave blank)</b>   |   | <b>2. REPORT DATE</b><br><br>June 2001                             | <b>3. REPORT TYPE AND DATES COVERED</b><br><br>Final                   |  |
| <b>4. TITLE AND SUBTITLE</b><br><br>A Semiempirical Method for Predicting Aerodynamics of Trailing Edge Flaps   |   |  | <b>5. FUNDING NUMBERS</b>  |  |
| <b>6. AUTHOR(s)</b><br><br>Frank G. Moore, Tom C. Hymer   |   |  |  |  |
| <b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b><br>Commander<br>Naval Surface Warfare Center<br>Dahlgren Division (Code G23)<br>17320 Dahlgren Road<br>Dahlgren, VA 22448-5100  |   |  | <b>8. PERFORMING ORGANIZATION REPORT NUMBER</b><br><br>NSWCDD/TR-01/30 |  |
| <b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>  |   |  | <b>10. SPONSORING/MONITORING AGENCY REPORT NUMBER</b>                  |  |
| <b>11. SUPPLEMENTARY NOTES</b>  |   |  |  |  |
| <b>12a. DISTRIBUTION/AVAILABILITY STATEMENT</b><br><br>Approved for public release; distribution is unlimited.  |   |  | <b>12b. DISTRIBUTION CODE</b>  |  |
| <b>13. ABSTRACT (Maximum 200 words)</b><br><br>An Improved Semiempirical Method has been developed to estimate the static aerodynamics of configurations that use a trailing edge flap for control. The method is based on deflecting the full aft-located lifting surface an amount that allows the normal force coefficient to be equal to that generated by the deflected flap. A transfer in pitching moments and a modified axial force coefficient is derived to complete the set of static aerodynamics. The method is derived using theoretical methods that are a part of the 1998 version of the Naval Surface Warfare Center aeroprediction code and two sets of experimental data. Comparison of the improved method to available data shows the method to give satisfactory results over the practical range that trailing edge flaps are contemplated for use. However, additional wind tunnel data is needed to refine and expand the applicability of the method. This is particularly true for transonic Mach numbers and for supersonic Mach numbers where the angle of attack and control deflection are of the same sign. |   |  |  |  |
| <b>14. SUBJECT TERMS</b><br><br>aerodynamics, Aeroprediction Code, Mach number, trailing edge flap  |   |  | <b>15. NUMBER OF PAGES</b><br><br>57                                   |  |
|   |   |  | <b>16. PRICE CODE</b>  |  |
| <b>17. SECURITY CLASSIFICATION OF REPORTS</b><br><br>UNCLASSIFIED   | <b>18. SECURITY CLASSIFICATION OF THIS PAGE</b><br><br>UNCLASSIFIED | <b>19. SECURITY CLASSIFICATION OF ABSTRACT</b><br><br>UNCLASSIFIED | <b>20. LIMITATION OF ABSTRACT</b><br><br>UL                            |  |

## FOREWORD

An idea that has been considered to provide control to some advanced guided projectile concepts is to deflect the rear part of the tail surface as opposed to the entire tail surface. This concept offers an advantage over deflecting the entire tail surface in terms of control volume, weight and cost. However, to estimate the aerodynamics of these types of aerodynamic concepts with the aeroprediction code requires hand calculations and engineering judgment over much of the range of flight conditions of interest. As a result, new technology has been developed to be integrated into the next version of the aeroprediction code which will allow aerodynamics of trailing edge flaps to be computed in an automated and more accurate manner than currently available approximate methods. This report documents this new aerodynamic prediction methodology for trailing edge flaps.

The work described in this report was supported by the Office of Naval Research through the Surface Weapons Systems Technology Program managed at the Naval Surface Warfare Center, Dahlgren Division (NSWCDD) by Mr. Robin Staton. Tasking from this program was provided by Mr. Roger Horman and Mr. John Fraysse. The authors express appreciation for support received in this work.

Approved by:



DANNY BRUNSON, Head  
Weapons Systems Department

**CONTENTS**

| <u>Section</u>                    | <u>Page</u> |
|-----------------------------------|-------------|
| 1.0 INTRODUCTION .....            | 1           |
| 2.0 ANALYSIS .....                | 4           |
| 3.0 RESULTS AND DISCUSSION.....   | 15          |
| 4.0 SUMMARY.....                  | 31          |
| 5.0 REFERENCES .....              | 33          |
| 6.0 SYMBOLS AND DEFINITIONS ..... | 34          |
| DISTRIBUTION.....                 | (1)         |

## ILLUSTRATIONS

| <u>Figure</u> |  | <u>Page</u> |
|---------------|--|-------------|
| 1             | PROJECTILE CONCEPT WHERE TRAILING EDGE FLAP IS DEFLECTED FOR CONTROL.....  | 2           |
| 2             | PHYSICAL AND MATHEMATICAL REPRESENTATION OF TRAILING EDGE FLAP DEFLECTION BY FULL WING DEFLECTION .....  | 5           |
| 3             | DRAWING OF THE MODEL USED FOR SUPERSONIC TESTS <sup>5</sup> [ALL LINEAR DIMENSIONS IN CENTIMETERS (INCHES)].....   | 7           |
| 4             | DELTA WING PLANFORM USED FOR SUBSONIC TESTS <sup>6</sup> (ALL DIMENSIONS IN INCHES).....   | 9           |
| 5             | VALUE OF PARAMETER $f_1$ AT SUPERSONIC SPEEDS BASED ON REFERENCE 5 DATA AND AP98.....  | 10          |
| 6             | VALUE OF PARAMETER $f_1$ AT SUBSONIC SPEEDS BASED ON REFERENCE 6 DATA AND AP98 .....   | 10          |
| 7A            | FACTOR WHICH CORRECTS FOR USE OF SECANT VERSUS TANGENT IN NORMAL FORCE CURVE SLOPE ( $\alpha$ AND $\delta$ OF OPPOSITE SIGNS).....                           | 11          |
| 7B            | FACTOR WHICH CORRECTS FOR USE OF SECANT VERSUS TANGENT IN NORMAL FORCE CURVE SLOPE ( $\delta_f = 10$ DEG) .....  | 11          |
| 7C            | FACTOR WHICH CORRECTS FOR USE OF SECANT VERSUS TANGENT IN NORMAL FORCE CURVE SLOPE ( $\delta_f = 30$ DEG) .....  | 12          |
| 8             | FLAP ALONE AND TRAILING EDGE FLAP ATTACHED TO WING AVERAGE CENTER OF PRESSURE OVER ANGLE OF ATTACK RANGE OF 0 TO 30 DEG FOR VARIOUS MACH NUMBERS .....       | 14          |
| 9             | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.5$ , $\delta_f = -20$ DEG)..... | 17          |

**ILLUSTRATIONS (Continued)**

| <u>Figure</u> |   | <u>Page</u> |
|---------------|---|-------------|
| 10            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.9$ , $\delta_f = -20$ DEG).....  | 18          |
| 11            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.3$ , $\delta_f = -20$ DEG).....  | 19          |
| 12            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.96$ , $\delta_f = -20$ DEG)..... | 20          |
| 13            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 3.95$ , $\delta_f = -20$ DEG)..... | 21          |
| 14            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 4.63$ , $\delta_f = -20$ DEG)..... | 22          |
| 15            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.5$ , $\delta = 10$ DEG).....     | 23          |
| 16            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.9$ , $\delta = 10$ DEG).....     | 24          |
| 17            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.3$ , $\delta = 10$ DEG).....     | 25          |
| 18            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.96$ , $\delta = 10$ DEG).....    | 26          |
| 19            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 3.95$ , $\delta = 10$ DEG).....    | 27          |

## ILLUSTRATIONS (Continued)

| <u>Figure</u> |  | <u>Page</u> |
|---------------|--|-------------|
| 20            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 4.63$ , $\delta = 10$ DEG) .....  | 27          |
| 21            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 0.4$ , $\delta_f$ NEGATIVE) .....   | 29          |
| 22            | COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 0.4$ , $\delta_f$ POSITIVE) .....   | 30          |
| 23            | COMPARISON OF THEORY AND EXPERIMENT FOR AXIAL FORCE COEFFICIENT AT VARIOUS VALUES OF FLAP DEFLECTION AND AS REPRESENTED BY AN EQUIVALENT DEFLECTION OF ENTIRE WING AT $\delta = 0$ DEG ( $R_N/f_t = 2.5 \times 10^6$ ) ..... | 31          |


## 1.0 INTRODUCTION

Conventional approaches to control weapons include aerodynamic controls where either the canards, wings, or tails are deflected a given amount to provide the required maneuverability to intercept a target. More recently, as weapons have attempted to hit targets flying at high altitudes where the atmosphere is quite thin, side jet thrusters are being considered to replace or compliment aerodynamic controls. These side jet thrusters can also be effective in cases where very short airframe time constants (the time it takes for a control system to generate about 63 percent of the required maneuverability) are required. For both the conventional aerodynamic or propulsive means of control, cost and control hardware weight and volume become prohibitive for some applications. These lower cost applications tend to be associated with stationary or slowly moving targets where maneuverability requirements are low, but improvements in accuracy over a ballistic weapon are necessary.

One idea that has been considered to meet the lower cost, lower maneuverability control concept is to deflect a part of a wing or tail surface as opposed to the entire surface. The portion of the tail surface considered for deflection is at the tail or wing trailing edge. Figure 1 is an illustration of a typical concept being considered where a part of the trailing edge portion of the tail fin is being considered for the control surface as opposed to the entire tail surface. As seen in Figure 1, this trailing edge flap concept is associated with a very low drag projectile design, and given a high initial velocity, can produce a fairly long range, even without a rocket motor. For long ranges, winds and other ballistic errors can produce sizeable miss distances without some sort of corrective device. While the large tail fins of the Figure 1 concept are needed for stability at a high velocity launch, deflecting the entire tail fin a significant amount to eliminate the ballistic errors is not needed. Only a fraction of the tail surface is required to provide adequate maneuverability if the deflection occurs over a sustained period of time. The small deflected surface area results in a much lower volume, weight and cost for the control system. As seen in Figure 1, the amount of area of the trailing edge can vary depending on the requirements. Shown in the figure is a variable semispan, root chord and hinge line for the trailing edge flap.

The most recent version of the NSWC aeroprediction code (AP98)<sup>1</sup> distributed to users is not capable of computing aerodynamics on a concept such as that shown in Figure 1 when the trailing edge flaps are deflected. The objective of this report is to develop the methodology to allow the next version of the aeroprediction code (AP02) to compute aerodynamics on a configuration where some portion of the rear part of the aft lifting surface (either wing or tail) can be deflected to provide control. In developing this trailing edge flap aerodynamic predictive methodology, considerations of the cost to integrate the new methodology into the aeroprediction code (APC) will be a prime driver in the method chosen.



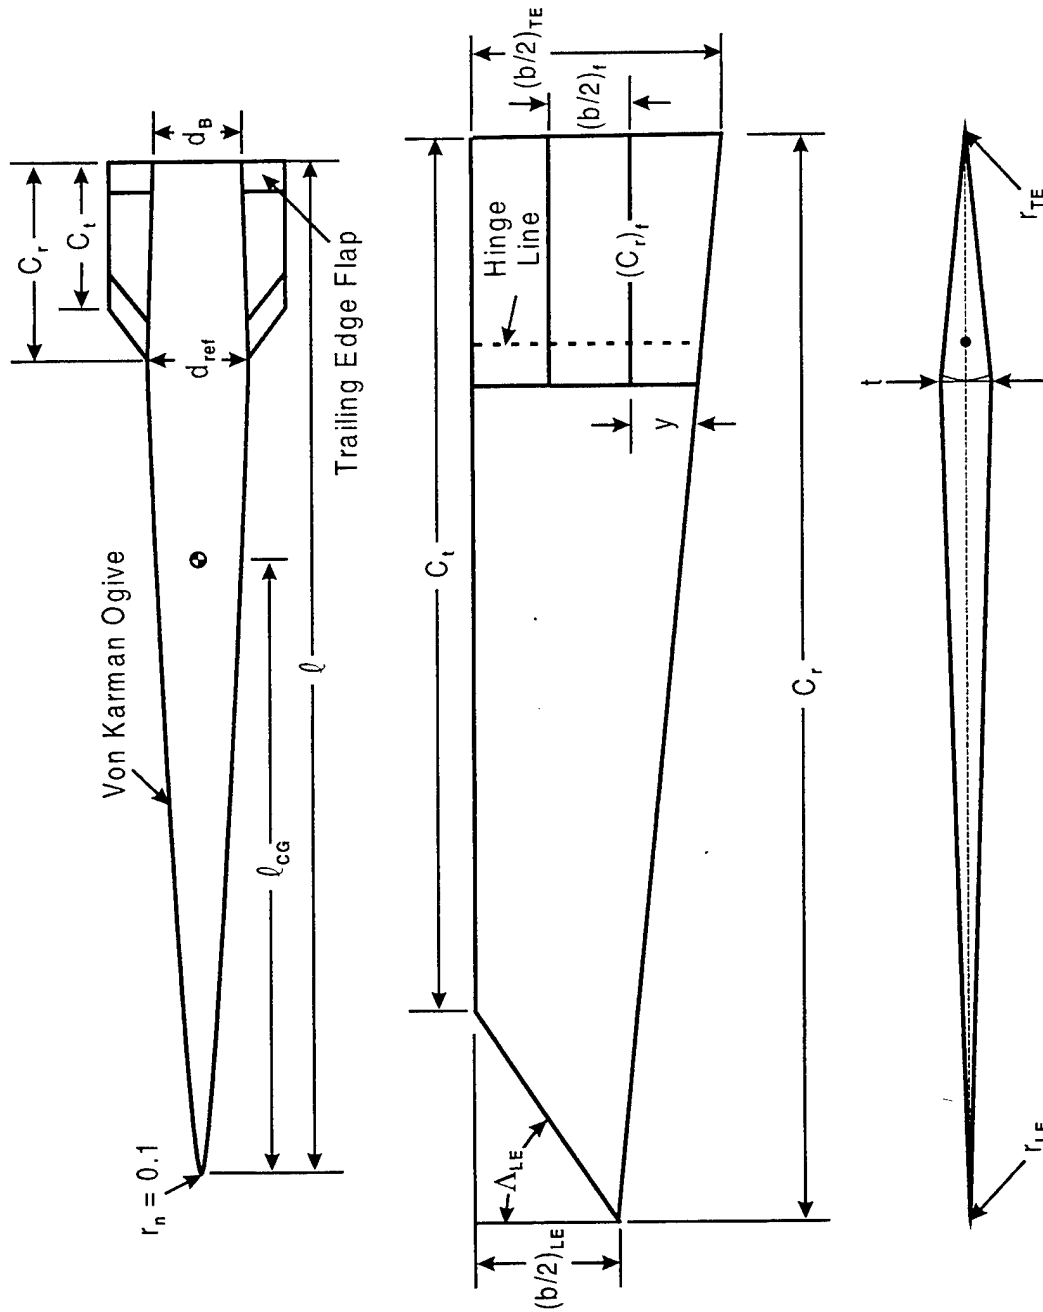

Enlarged View of Fin Planform and Root Cross Section

FIGURE 1. PROJECTILE CONCEPT WHERE TAIL TRAILING EDGE FLAP IS DEFLECTED FOR CONTROL

In reviewing the literature to determine approaches to use for calculating the aerodynamics of trailing edge flaps, the general approach that comes closest to that desired for use in the future AP02 is that adopted for the Missile Datcom.<sup>2</sup> In that approach, an equivalent value of deflection for the entire wing or tail surface is determined to reflect a given flap deflection. In other words

$$\delta_w = f(\delta_f) \quad (1)$$

The equivalent value of  $\delta_w$  is determined offline using methods in the airplane DATCOM<sup>3</sup> at subsonic speeds and the method of Goin<sup>4</sup> at supersonic speeds. The advantage of an approach such as Equation (1) for codes such as Missile Datcom<sup>2</sup> or AP98<sup>1</sup> is that this is the least costly and most straightforward approach to incorporate the computation of aerodynamics of trailing edge flaps into an existing computer code. The low cost is because codes such as AP98<sup>1</sup> or Missile Datcom<sup>2</sup> are generally already set up logic wise to compute the aerodynamics of a configuration where one set of fins are deflected. Hence, if one can define what that wing deflection is in terms of some flap deflection, the codes<sup>1,2</sup> can be exercised to provide a set of aerodynamics that simulate a configuration with a trailing edge flap deflected by a given amount.

While the approach used by the Missile Datcom [Equation (1)] to compute aerodynamics of trailing edge flaps is the same approach that will be adopted for use here, the methods that will be used for the AP02 will differ from those<sup>3,4</sup> used in the Missile Datcom.<sup>2</sup> There are several reasons for this. First of all, the method of Goin<sup>4</sup> has too many limitations. Some of these limitations include requirements for supersonic leading and trailing edges of the flap hinge line, viscous effects are not accounted for, and the method does not include nonlinearities due to large flap deflections or angles of attack (AOAs). Secondly, while the method of Reference 3 takes into account some of the viscous and nonlinear effects that Reference 4 does not account for, the method itself is inconsistent with that of Reference 4.

The objective here is thus to derive an improved method to compute aerodynamics of trailing edge flaps that utilize the Equation (1) approach. The method should be similar for both subsonic and supersonic freestream Mach numbers, should not be limited to supersonic leading and trailing edges, should account (at least empirically) for viscous effects, and should account for nonlinearities associated with large flap deflections or AOAs. From a practical standpoint, the weapons that will use the trailing edge flaps for control will typically fly at fairly small trim AOAs (less than 10 deg). However, flap deflections as large as  $\pm 30$  deg are not unreasonable in order to achieve the appropriate trim AOA desired. Also, from a practical standpoint, most applications will be below  $M_\infty = 2.0$ . However, the method should be general enough to be applied over the Mach number range of applicability of the AP98 or AP02, which is 0 to 20. On the other hand, the method will not be validated over this large Mach number range due to limited experimental data.

## 2.0 ANALYSIS

To most efficiently implement the methodology for computing the aerodynamics of a weapon concept that is controlled by trailing edge flaps, we will seek the definition of the equivalent wing deflection that yields the same normal force, pitching moment and trim AOA as that obtained by deflecting the trailing edge flaps. In mathematical terms,

$$N_{W(B)} + N_{B(w)} = N_f f_1 \quad (2)$$

$$M_{W(B)} + M_{B(w)} = N_f f_1 [(X_{CP})_f - X_{ref}] \quad (3)$$

$$(\alpha_{TR})_W = (\alpha_{TR})_f \quad (4)$$

In reality, if Equations (2) and (3) are satisfied, Equation (4) will automatically be satisfied. We thus must define the relationships that allow Equations (2) and (3) to be satisfied.

Notice that in Equations (2) and (3), the wing-body normal force and pitching moments are equated to the normal force and pitching moment coefficients of the flap alone (with no interference effects present) times an empirical constant. There are a couple of reasons for this. First, when the entire wing is deflected it will have carryover normal force onto the wing. This means the equivalent control deflection of the entire wing will be lower than if no carryover normal force were present. Secondly, while there will be some interference carryover normal force onto the flap from the wing or body, this extra normal force can be lumped into an empirical term,  $f_1$ , which will be defined later.

Equation (2) can be expanded as

$$\begin{aligned} [C_{N_{W(B)}} + C_{N_{B(w)}}]_{\delta_w} Q A_{ref} &= [C_N]_{\delta_f} f_1 Q A_{ref} \\ \text{or} \\ (C_{N_\alpha})_W [k_{W(B)} + k_{B(w)}] \delta_w &= (C_{N_\alpha})_f f_1 \delta_f \end{aligned} \quad (5)$$

The empirical factor,  $f_1$ , of Equation (5) accounts for several physical phenomena. These include boundary layer buildup and separation of the flow ahead of the flap on the wing surface; flap thickness effects; effects of the slot created between the wing and flap when the flap is deflected; and interference effects of the flap onto the body or wing, or the wing or body onto the flap. The factor  $f_1$  will be determined empirically based on experimental data for wings which have trailing edge flaps. Figure 2 attempts to pictorially and mathematically show the representation of a trailing edge flap deflection by deflecting the full wing.

To determine  $f_1$ , we equate the right hand side of Equation (5) to the change in normal force coefficient at some AOA due to a control deflection  $\delta_f$ . That is

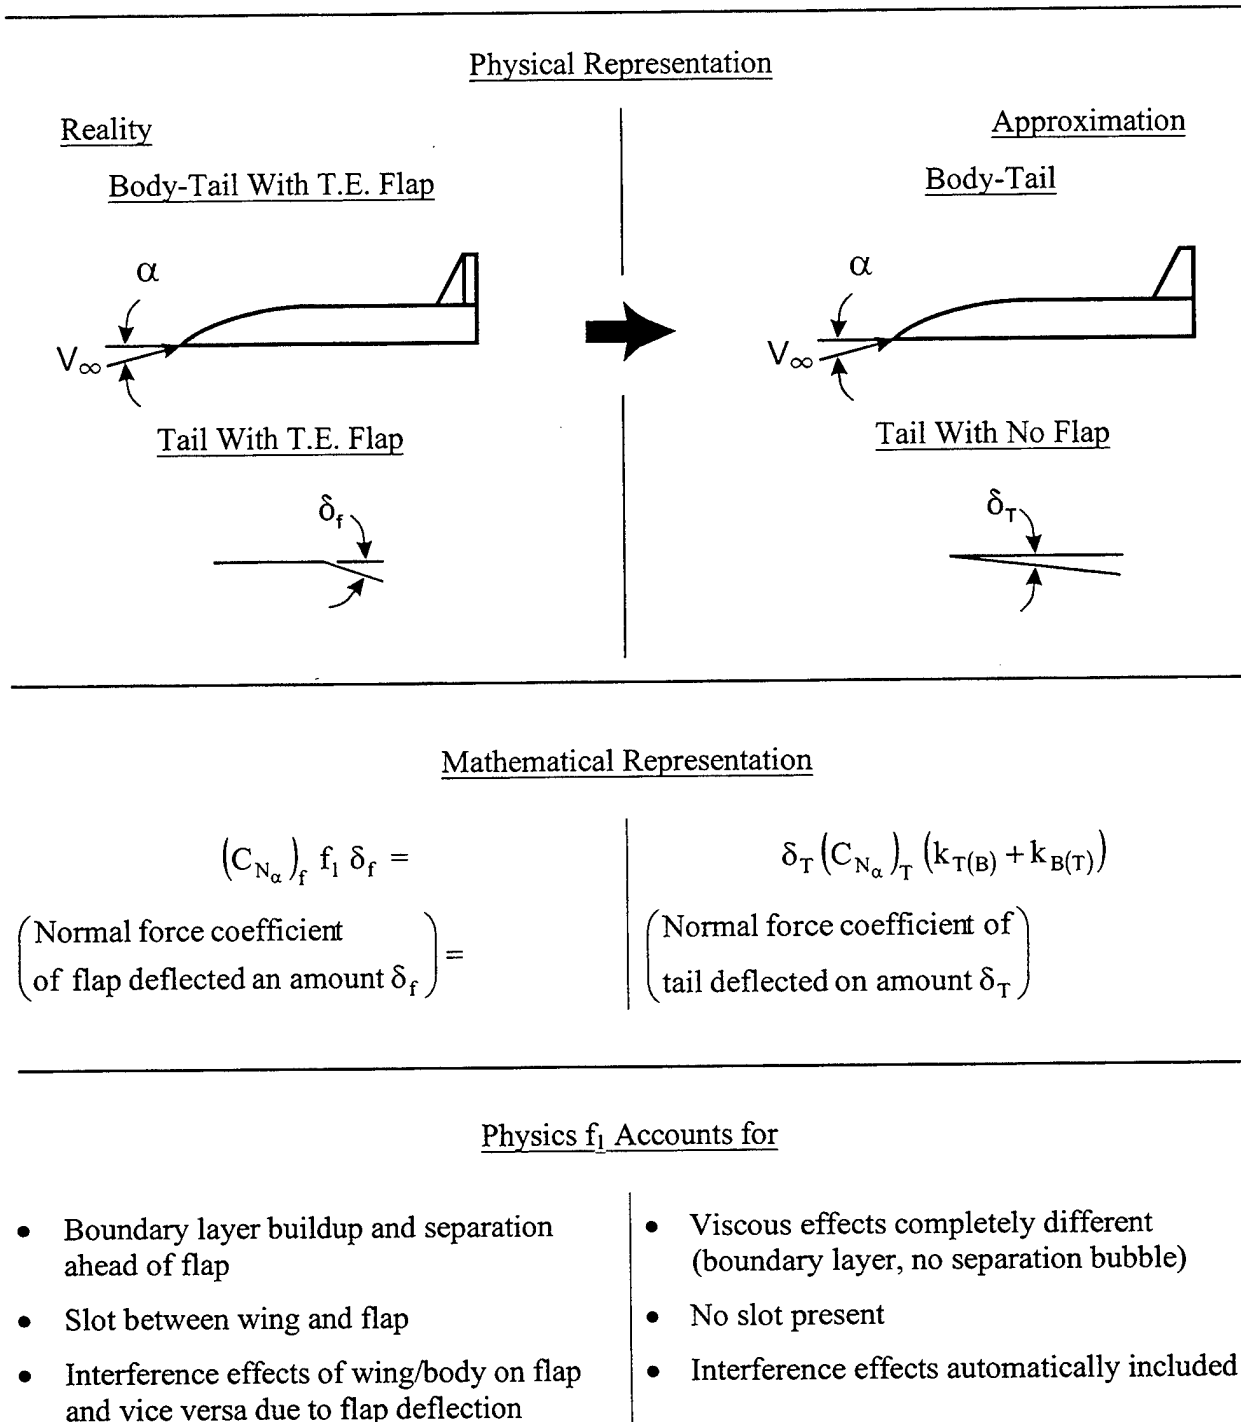


FIGURE 2. PHYSICAL AND MATHEMATICAL REPRESENTATION OF TRAILING EDGE FLAP DEFLECTION BY FULL WING DEFLECTION


$$f_1 = \frac{(\Delta C_{N_f})}{(C_{N_\alpha})_f \delta_f f_2} \quad (6)$$

$\Delta C_{N_f}$  of Equation (6) is the additional normal force coefficient created by a flap deflection  $\delta_f$ .  $(C_{N_\alpha})_f$  is the theoretical normal force coefficient slope for the flap of given aspect ratio and taper ratio at a given Mach number and AOA. This theoretical value is determined by the methods in the AP02 for a flap only (no wing ahead of it). The AP02 methods include linearized theories at low AOA or control deflection combined with empirical approaches at higher AOA. These methods in the AP98 or AP02 are fairly general and can calculate aerodynamics on supersonic or subsonic leading edge wings or flaps at low AOA. Also, aerodynamics can be computed for Mach numbers 0 to 20 and AOAs to 90 deg. Hence, the theoretical methodology for computing  $(C_{N_\alpha})_f$  is fairly general. The value of  $(C_{N_\alpha})_f$  is actually computed using a secant slope for a given AOA. This value of  $(C_{N_\alpha})_f$  is then multiplied by the given flap deflection,  $\delta_f$  as seen in Equation (6). The numerator of Equation (6) is based on experimental data, which accounts for various physical phenomena of a flap in conjunction with a wing, which a wing alone does not have. Hence, the empirical factor  $f_1$  is generated by the ratio of experimental data for a flap on a wing to a theoretical wing alone solution.

The factor  $f_2$  in the denominator of Equation (6) is used to account for the fact that the theory in the AP02 which defines the lift curve slope of an entire wing deflected an amount  $\delta$  at a given AOA may not accurately predict the increment in normal force generated by a flap. The factor  $f_2$  is expected to be near one at supersonic speeds. However, at subsonic speeds, wind tunnel data suggests the theoretical predictions of additional normal force generated by a flap are higher than what the theory suggests. This inaccuracy of the theory arises from using the secant slope for  $(C_{N_\alpha})_f$  versus using the local slope at a given value of  $\alpha$ . At supersonic speeds, use of the secant slope does not appear to be a problem. However, subsonically, the  $C_N$  versus  $\alpha$  curve levels out at around 25 to 30 deg AOA, so an additional increase in  $\alpha$  brings increasingly less increase in  $C_N$ . Using a secant slope for  $(C_{N_\alpha})_f$  versus the local tangent gives a value of  $(C_{N_\alpha})_f$  which is too large and therefore a value of  $f_1$  which is too low. The parameter  $f_2$  therefore corrects for this weakness. One could change the overall AP02 code to use local versus secant slopes. However, this would be a very costly and time consuming process, and it was much more cost effective to define the factor  $f_2$  to take care of this correction.

In Equation (6), it is assumed both the numerator and denominator are based on the same reference area  $A_{ref}$ . If  $(C_{N_\alpha})_f$  is calculated based on a wing alone solution for the flap, then the Equation (6) must be multiplied by  $A_{ref}/A_f$  to have consistent reference areas.

To define the empirical factor  $f_1$ , two data bases will be used.<sup>5,6</sup> Reference 5 contains data for a canard-body-tail configuration (see Figure 3) with trailing edge flaps. Data is available for Mach numbers 1.5 to 4.63, AOAs -2 to about 30 deg (except for  $M_\infty = 1.5$  where some data

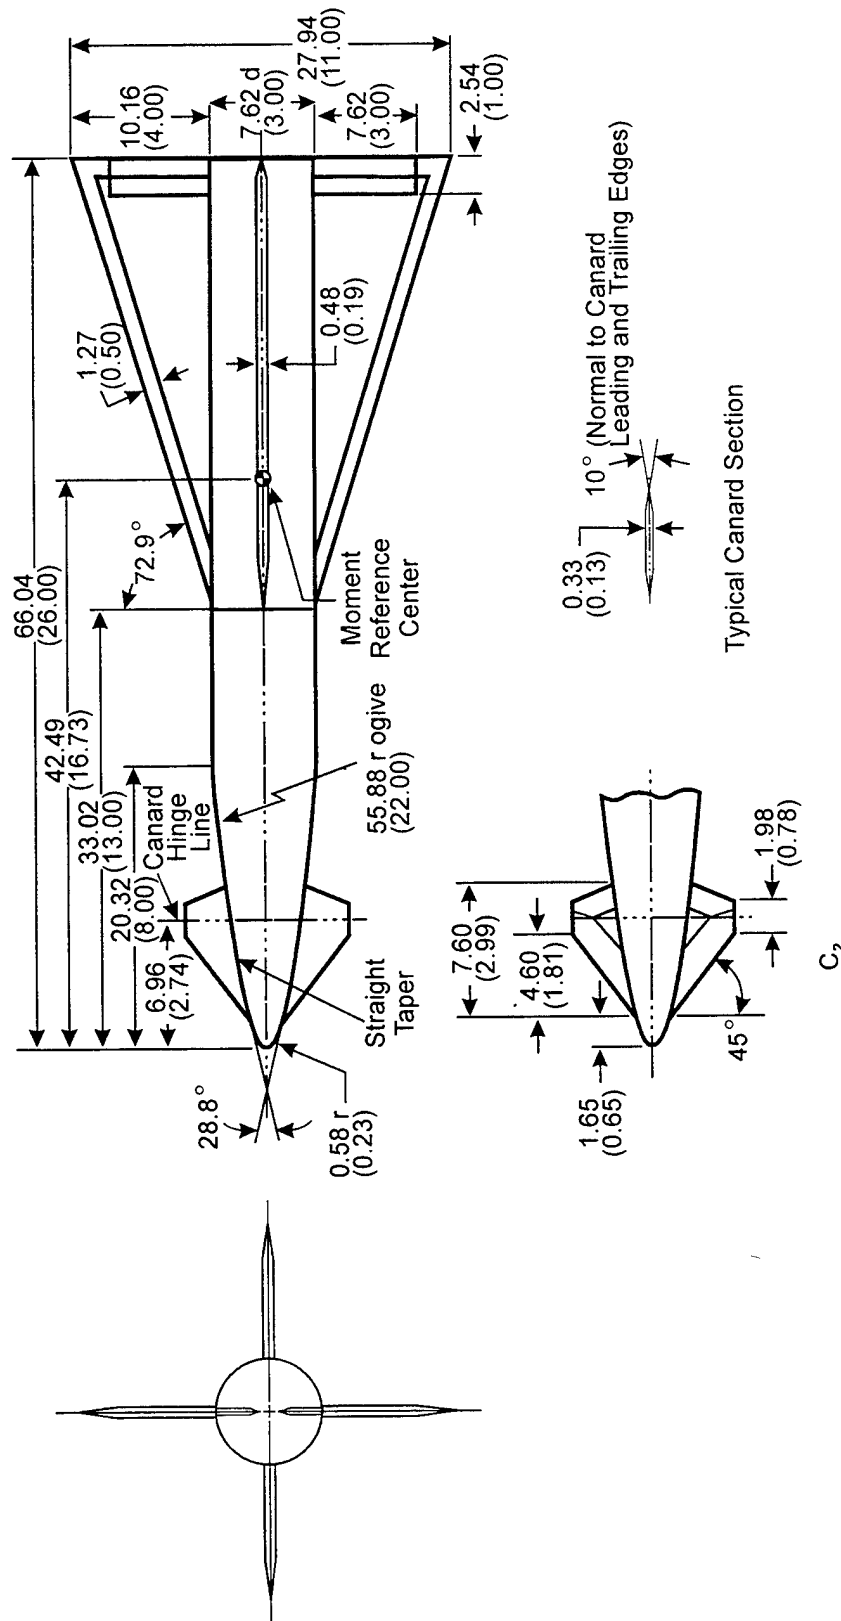

is available only to about 15 deg AOA), and control deflections 0 to -30 deg. Unfortunately, no positive values of  $\delta_f$  were available in Reference 5, probably since a negative value of  $\delta_f$  is required for trim to occur when  $\alpha$  is positive.

Reference 6 contains data for low Mach numbers ( $M_\infty = 0.3$  to  $0.5$ ) for several different configurations. These configurations included an elliptical and circular cylinder-shaped bodies with either a delta or sweptback rectangular wing. The wings could have either a leading or trailing edge flap. The configuration of most interest here is the delta wing with trailing edge flaps on a circular cylinder body (see Figure 4). Data is available to 40 deg AOA for flap deflections of  $\pm 10$  and  $\pm 30$  deg. Hence, Reference 6 will complement the supersonic data of Reference 5.

For Mach numbers in between  $M_\infty = 0.4$  and  $M_\infty = 1.5$ , the following procedure will apply for computing  $f_1$ . For Mach numbers below  $M_\infty = 0.8$ , the value of  $f_1$  computed at  $M_\infty = 0.4$  will be assumed to apply. For Mach numbers between  $M_\infty = 1.5$  and  $0.8$ , linear interpolation will be used to compute  $f_1$  based on the values of  $f_1$  at  $M_\infty = 1.5$  and  $0.8$ .

Figures 5 and 6 give the values of  $f_1$  determined by using References 5 and 6 to find values of  $(\Delta C_N)_f$  and Reference 1 to compute a value of  $(C_{N_\alpha})_f$  at a given AOA. Figure 5 is when  $\alpha$  and  $\delta$  are of opposite signs, which is the practical case for trim when the aft located control surface is deflected. Figure 5 applies for  $M_\infty \geq 1.5$  and for values of  $\alpha$  and  $\delta$  of the same sign when  $\alpha$  is numerically small. No data has been found to ascertain the validity of Figure 5 when  $\alpha$  and  $\delta$  are the same sign and  $\alpha$  is greater than a small value. For  $M_\infty > 4.63$ , the value of  $f_1$  at  $M_\infty = 4.63$  will be assumed. Also Figure 5 holds for values of  $\delta_f$  up to -30 deg, based on the Reference 5 data.

Figure 6 gives values of  $f_1$  for  $M_\infty = 0.4$  for values of  $\alpha$  up to 30 deg and for values of  $\delta_f$  of  $\pm 30$  deg. Figure 6 values of  $f_1$  utilize the values of  $f_2$  from Figure 7. Figure 7A presents the most practical case for tail-located trailing edge flaps since  $\alpha$  and  $\delta_f$  must be of opposite signs for trim to occur. Figures 7B and 7C present results for  $f_2$  when  $\alpha$  and  $\delta_f$  are of the same sign. Figure 7B is for  $\delta_f = 10$  deg and Figure 7C is for  $\delta_f = 30$  deg. Linear interpolation of the Figures 7B and 7C will occur for values of  $\delta_f$  other than 10 or 30 deg.

Knowing  $f_1$  from Figures 5 or 6, Equation (5) can be rewritten as

$$\delta_w = \left[ \frac{(C_{N_\alpha})_f f_1}{(C_{N_\alpha})_w (k_{w(B)} + k_{B(w)})} \right] \delta_f \quad (7)$$

The way Equation (7) is utilized within the AP02 is as follows:

1. For a given flap size,  $(C_{N_\alpha})_f$  is computed from the wing alone solution in the AP02 at a given  $M_\infty$ ,  $\alpha$ , AR and  $\lambda$ . This value of  $(C_{N_\alpha})_f$  is then related to  $A_{ref}$  versus  $A_f$ .

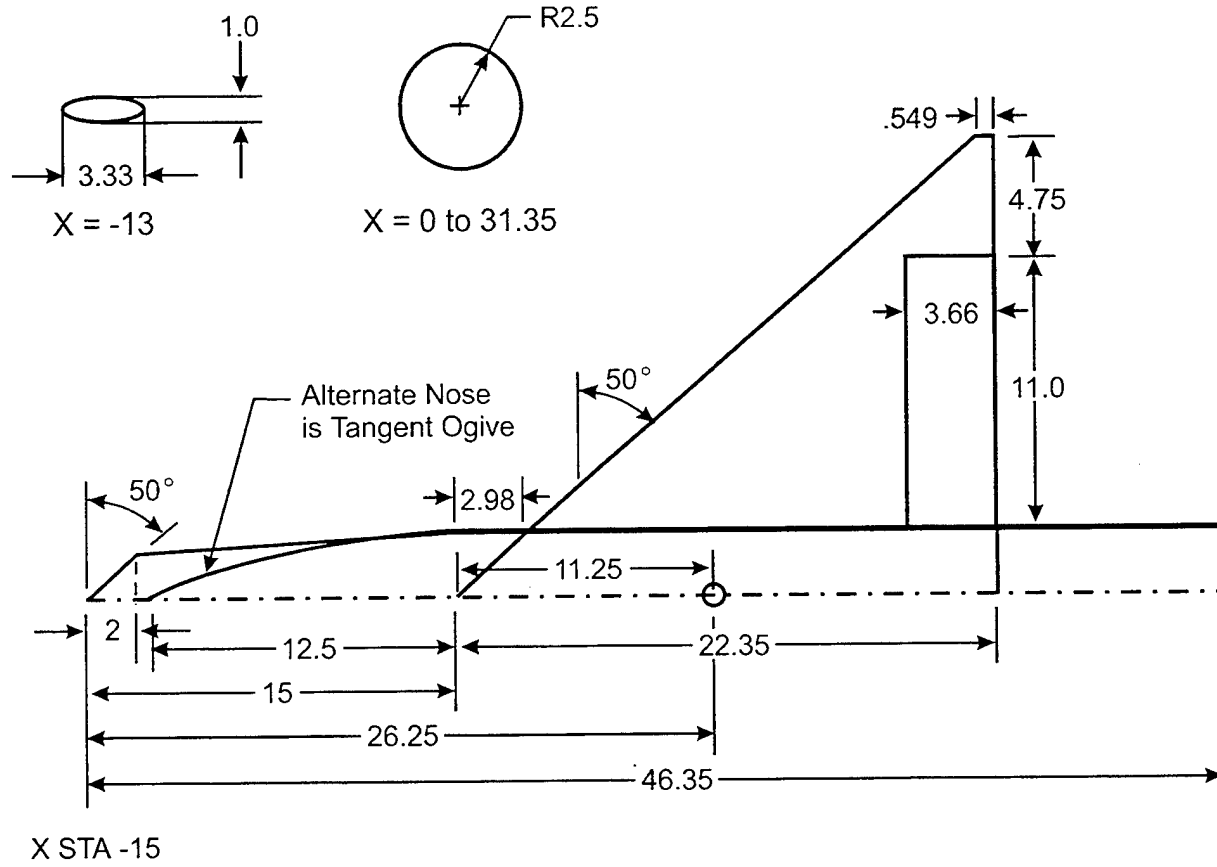


FIGURE 4. DELTA WING PLANFORM USED FOR SUBSONIC TESTS<sup>6</sup>  
(ALL DIMENSIONS IN INCHES)



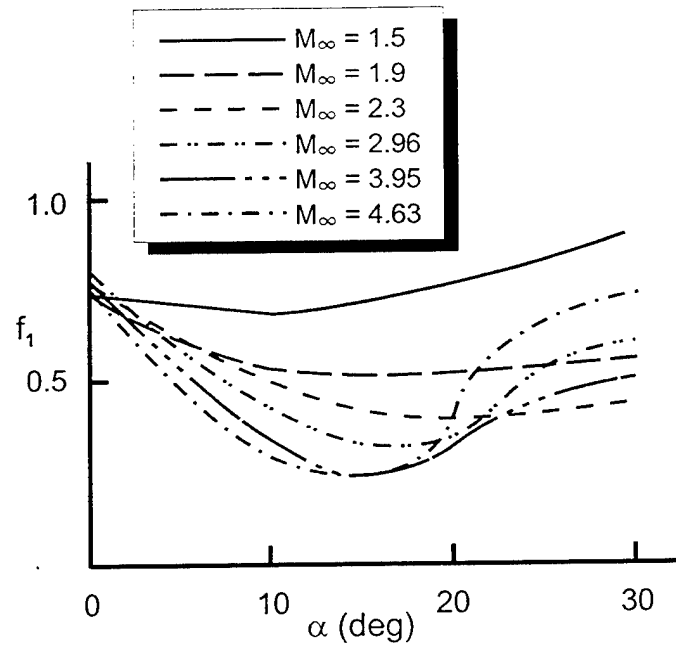


FIGURE 5. VALUE OF PARAMETER  $f_1$  AT SUPERSONIC SPEEDS  
BASED ON REFERENCE 5 DATA AND AP98

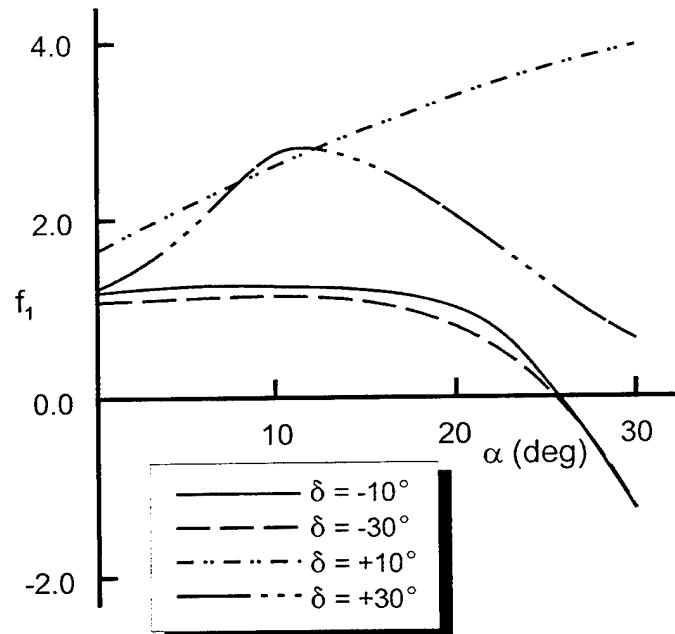


FIGURE 6. VALUE OF PARAMETER  $f_1$  AT SUBSONIC SPEEDS  
BASED ON REFERENCE 6 DATA AND AP98

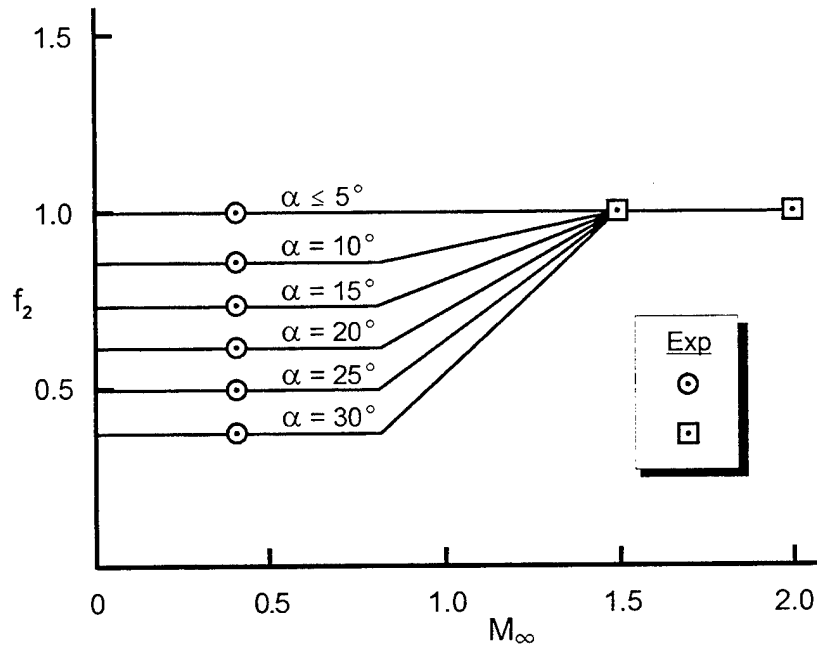


FIGURE 7A. FACTOR WHICH CORRECTS FOR USE OF SECANT VERSUS TANGENT IN NORMAL FORCE CURVE SLOPE ( $\alpha$  AND  $\delta$  OF OPPOSITE SIGNS)

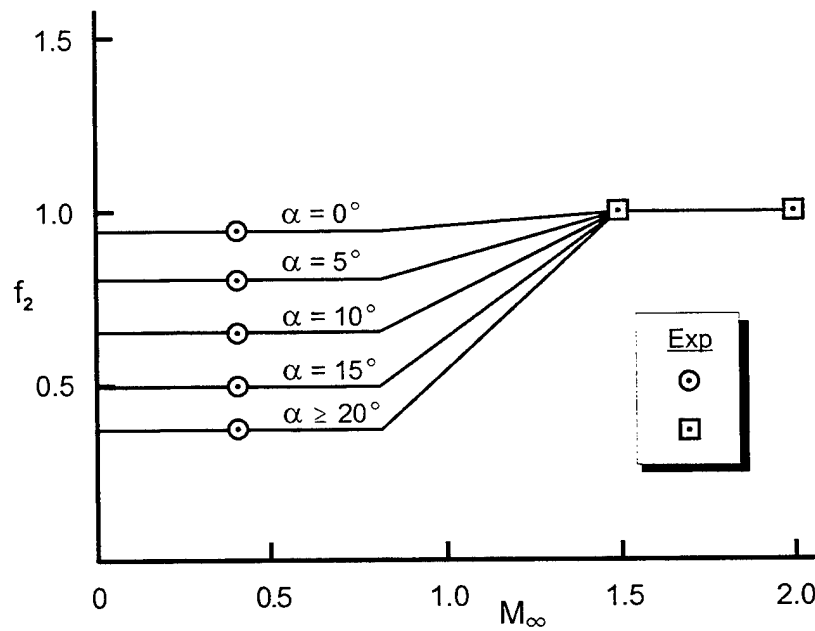


FIGURE 7B. FACTOR WHICH CORRECTS FOR USE OF SECANT VERSUS TANGENT IN NORMAL FORCE CURVE SLOPE ( $\delta_f = 10$  DEG)

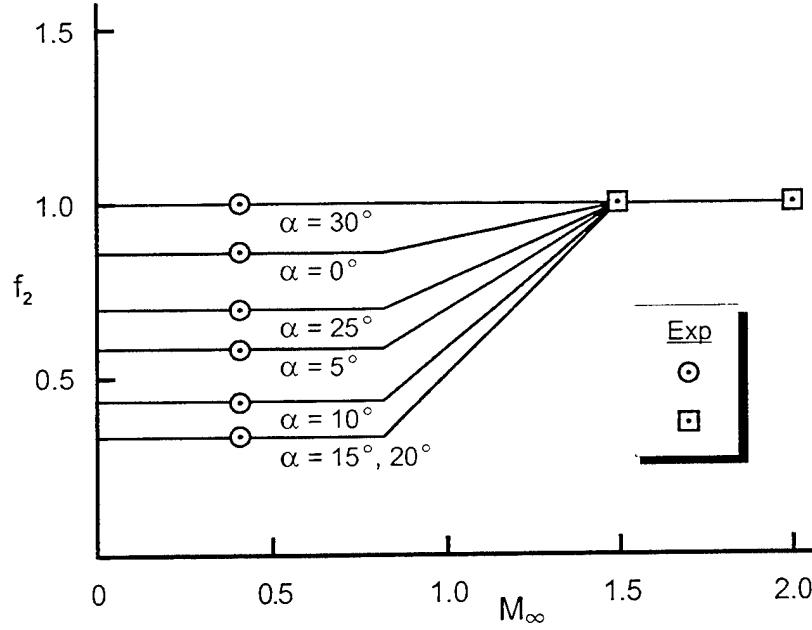


FIGURE 7C. FACTOR WHICH CORRECTS FOR USE OF SECANT VERSUS TANGENT IN NORMAL FORCE CURVE SLOPE ( $\delta_f = 30$  DEG)

2.  $f_1$  is then computed via table lookup for a given value of  $\alpha$ ,  $M_\infty$  and  $\delta_f$  (if the flow is subsonic).
3. For a given wing size,  $(C_{N_\alpha})_w$  is computed from the wing alone solution in the AP02 at a given  $M_\infty$ ,  $\alpha$ , AR and  $\lambda$ . This value of  $(C_{N_\alpha})_w$  must again be based on  $A_{ref}$ .
4. Values of  $k_{W(B)}$  and  $k_{B(W)}$  are then computed at a given  $\alpha$  using the nonlinear control methodology in the AP02. This methodology uses slender body theory as a basis for low AOA estimates and wind tunnel data at high AOA to modify these estimates.
5. For a given value of  $\delta_f$ , an effective value of  $\delta_w$  is then computed based on Equation (7). This value of  $\delta_w$  is the amount the entire wing is deflected to approximate the additional normal force of a wing due to a trailing edge flap deflection of an amount  $\delta_f$ .

Equation (7) defines the equivalent fin deflection to give the same normal force that deflecting the rear part of the fin an amount  $\delta_f$  would give. The normal force coefficient of the flap or fin is computed from Equation (6). That is

$$(\Delta C_N)_f = f_1 (C_{N_\alpha})_f \delta_f \quad (8)$$

The question that we must now address is the pitching moment for the flap. By deflecting the entire wing an amount  $\delta_f$  defined by Equation (8), the pitching moment for the wing will be

based on the center of pressure of the entire wing, not that due to the flap. Thus to obtain the correct pitching moment for the flap, where the entire wing is deflected, a change in the center of pressure must be calculated.

Most trailing edge flaps under consideration have a fairly high aspect ratio with a fairly small root chord. The initial thought by the author was to assume the center of pressure of the normal force generated by the trailing edge flap would be similar to that on a high aspect ratio wing alone. That is for subsonic flow, the center of pressure would be around the quarter chord location and then transition to the half chord location around  $M_\infty = 2.0$ . However, in comparing this assumed location to the experimental data of References 5 and 6, it was clear this assumption on center of pressure location was not correct. It is believed the reason for the center of pressure assumption not being correct is that the flap cannot be treated as a wing in isolation at most Mach numbers. At a Mach number of 1.5, the assumption of  $\frac{1}{4}$  chord transitioning to  $\frac{1}{2}$  chord supersonically was a good assumption (see Figure 8). However, at other Mach numbers, assuming the center of pressure of the flap normal force could be treated similar to a high aspect ratio wing in isolation became increasingly erroneous as seen by the experimental data of Figure 8. In giving the behavior of the experimental data in Figure 8 some thought, the author believes that the physics of the flow can explain the Figure 8 experimental data. That is, as Mach number increases and the trailing edge flap is deflected, a shock is created ahead of the leading edge of the flap. This shock in turn creates a high pressure region on the wing where the flap is attached. This high pressure region is the reason for the experimental center of pressure of the flap normal force actually lying ahead of the leading edge of the flap as seen by Figure 8. The dashed line in Figure 8 is the new assumed center of pressure of the flap normal force as a function of Mach number. Notice that in Figure 8,  $[(X_{CP})_f / C_r]_{avg}$  represents the average center of pressure over the AOA range from 0 to 30 deg as a fraction of the root chord of the flap.

At a subsonic Mach number of 0.4, the center of pressure also lies ahead of the flap. If the flap deflection has the same sign as the AOA, this center of pressure location is about 0.7 chord lengths ahead of the flap leading edge. If the flap deflection is of opposite sign to the AOA, the center of pressure is about 0.4 chord lengths ahead of the flap leading edge. For Mach numbers 0 to 0.8, it is assumed these values of 0.4 and 0.7 chord lengths hold constant. For Mach numbers 0.8 to 1.5, it is assumed the location of the flap center of pressure varies linearly between the values at  $M_\infty = 0.8$  and 1.5.

The physics which cause the center of pressure to move ahead of the flap are believed to be different for the subsonic and supersonic cases. Supersonically, it is believed viscous effects as well as the shock structure are the dominant features. However, subsonically, it is believed the flap deflection rearranges the pressure distribution on the wing ahead of the flap as well as the viscous effects, which are present at all Mach numbers. The rearrangement of the pressure distribution on the wing ahead of the flap occurs because in subsonic flow, disturbances in the flow can feed forward, whereas supersonically they cannot, except through the boundary layer.

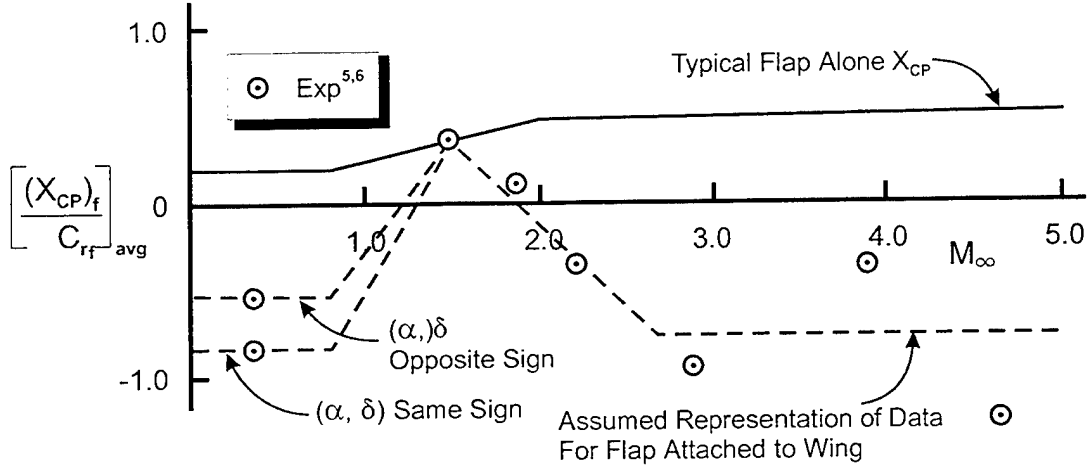


FIGURE 8. FLAP ALONE AND TRAILING EDGE FLAP ATTACHED TO WING AVERAGE CENTER OF PRESSURE OVER ANGLE OF ATTACK RANGE OF 0 TO 30 DEG FOR VARIOUS MACH NUMBERS

From a practical standpoint, the effect of the flap center of pressure shift diminishes its effectiveness somewhat in generating trim AOA. This is because the center of pressure of the normal force actually lies in front of the flap at most Mach numbers, decreasing the moment somewhat and hence the trim AOA. On the other hand, if the flap is located near the base of a fairly long body, a one to four inch shift in the center of pressure forward can be fairly small in terms of the overall moment arm. The amount of normal force created does not seem to be affected by the forward shift in center of pressure for trailing edge flaps.

The center of pressure of the trailing edge flap is therefore

$$\frac{(X_{CP})_f}{\ell_{ref}} = \frac{(X_{LE})_w + C_{rw} - C_{rf} f_3 - X_{ref}}{\ell_{ref}} \quad (9)$$

The term  $f_3$  of Equation (9) is based on the empirically defined dotted lines of Figure 8. That is

$$\begin{aligned} f_3 &= +1.5 \text{ for } M_\infty \leq 0.8 \text{ and } (\alpha, \delta) \text{ opposite signs} \\ &= +1.8 \text{ for } M_\infty \leq 0.8 \text{ and } (\alpha, \delta) \text{ same signs} \\ f_3 &= 2.53 - 1.29 M_\infty \text{ for } 0.8 < M_\infty \leq 1.5 \text{ and } (\alpha, \delta) \text{ opposite signs} \\ &= 3.17 - 1.71 M_\infty \text{ for } 0.8 < M_\infty \leq 1.5 \text{ and } (\alpha, \delta) \text{ same signs} \\ f_3 &= -0.84 + 0.96 M_\infty \text{ for } 1.5 < M_\infty \leq 2.7 \\ &= 1.75 \quad \text{for } M_\infty > 2.7 \end{aligned} \quad (10)$$

Using Equations (9) and (10), the change in pitching moment created by the fact the wing is deflected to simulate the trailing edge flap deflection is then

$$(\Delta C_M)_f = -\frac{\Delta C_{N_f}}{\ell_{ref}} \{ [(X_{CP})_f - (X_{CP})_w] + [(X_{CP})_w - X_{CG}] \} \quad (11)$$

Equation (11) represents the pitching moment coefficient of any configuration where the trailing edge flap deflection is approximated by deflecting the full wing. The first term of Equation (11) represents the difference in the center of pressure between the flap and wing whereas the second term represents the center of pressure of the wing normal force term relative to a reference location which is here taken to be the center of gravity of the vehicle. Of course, the center of pressure of the wing is computed in the AP02 using linear theory methods at low AOA and transitions to the centroid of the wing planform area at high AOA.

The major focus in the analysis for estimating the aerodynamics of trailing edge flaps has been to determine an equivalent tail deflection which will give normal force and pitching moments equal to those when the flap is deflected. No mention of axial force has been made to this point in time. The axial force coefficient will be different for an equivalent wing deflection based on a flap deflection  $\delta_f$ . The flap deflection will generate an additional axial force term due to the fact  $\delta_f$  will be generally much larger than  $\delta_w$ . An approximate relation which can be used to calculate the increment in axial force coefficient that results from estimating the aerodynamics based on a wing deflection of  $\delta_w$  versus a flap deflection of  $\delta_f$  is

$$(\Delta C_A)_f \equiv \Delta(C_N)_f [\sin|\delta_f| - \sin|\delta_w|] \quad (12)$$

$\Delta C_{N_f}$  of Equation (12) is the additional normal force contribution due to the flap.  $\sin|\delta_f|$  takes the component of this normal force term in the axial direction.  $\sin|\delta_w|$  subtracts off the component of axial force of the wing since this is automatically included in the AP02 calculations; to leave this term in the calculations would mean we would double account for the wing deflection axial force contribution.

### 3.0 RESULTS AND DISCUSSION

Equations (8) and (11) define the theoretical change in normal force and pitching moment coefficients due to a flap deflection. The value of  $\Delta C_{N_f}$  computed by the theory is that value defined by

$$\Delta C_{N_f} = (C_N)_{\delta_w=0} - (C_N)_{\delta_w \neq 0} \quad (13a)$$

The value of  $\delta_w$  in Equation (13a) is obtained from Equation (7) using the process defined earlier in the analysis section of this report. Using the values of  $\delta_w$  from Equation (7) in the AP98, values of  $(C_N)_{\delta_w=0}$  and  $(C_N)_{\delta_w \neq 0}$  of Equation (13a) can be computed and then  $\Delta C_{N_f}$  defined

theoretically. This value of  $\Delta C_{N_f}$  can then be compared to experimental data where  $\Delta C_{N_f}$  is obtained using experimental data for  $(C_N)_{\delta_f=0}$  and  $(C_N)_{\delta_f \neq 0}$ . That is

$$\Delta C_{N_f} = (C_N)_{\delta_f=0} - (C_N)_{\delta_f \neq 0} \quad (13b)$$

Likewise, experimentally measured values of  $\Delta C_{M_f}$  can be defined as

$$\Delta C_{M_f} = (C_M)_{\delta_f=0} - (C_M)_{\delta_f \neq 0} \quad (14)$$

and compared to theoretical values computed from Equation (11).  $\Delta C_{N_f}$  of Equation (11) comes from the theoretical values defined by Equation (13a). Thus comparison of  $\Delta C_{N_f}$  values obtained by Equation (13a) to (12) and  $\Delta C_{M_f}$  values obtained from Equation (11) to Equation (14) will allow us to determine the validity and accuracy of the new theory.

The first set of data we will consider is from Reference 5. The configuration tested in the wind tunnel is shown in Figure 3. Figures 9-14 compare theory and experiment for  $(\Delta C_N)_f$  and  $(\Delta C_M)_f$  at  $\delta_f = -20$  deg and Mach numbers 1.5, 1.9, 2.3, 2.96, 3.95, and 4.63. Results are plotted as a function of AOA up to 30 deg. For Mach numbers 1.5 and 1.9, experimental data was not available up to 30 deg AOA, so data was shown where available. As seen in the figures, the theory does a reasonable job in matching the data for both  $\Delta C_{N_f}$  and  $\Delta C_{M_f}$ , except at  $M_\infty = 4.63$  and  $\alpha \geq 20$  deg. At these conditions the theory overpredicts the normal force and pitching moment increments somewhat. However, since this region is beyond the anticipated practical range of usage ( $M_\infty < 2.0$ ,  $\alpha < 20$ ,  $|\delta_f| < 30$  deg), no effort will be made to try to improve upon the theory at this condition.

Also shown on the  $(\Delta C_M)_f$  portion of Figures 9-14 are the results of assuming the center of pressure of the flap is based on the flap in freestream flow and with the flap attached to the trailing edge. The flap attached to the trailing edge computations take into account the center of pressure shift shown in Figure 8. Note that at  $M_\infty = 1.5$ , no shift is shown so the Figure 9 pitching moment results show no change between the flap alone and the flap attached. However, Figures 10-14 show a change in pitching moment between flap alone and the flap attached. As seen in Figures 10-14, using the Figure 8 results tend to show an improvement in pitching moment calculations over assuming the flap alone.

It is also worthwhile to reemphasize the fact that all the theoretical calculations shown in Figures 9-14 (as well as the figures which will follow) were computed by using the AP02 in conjunction with Equation (7) as described in the Analysis Section of the report.

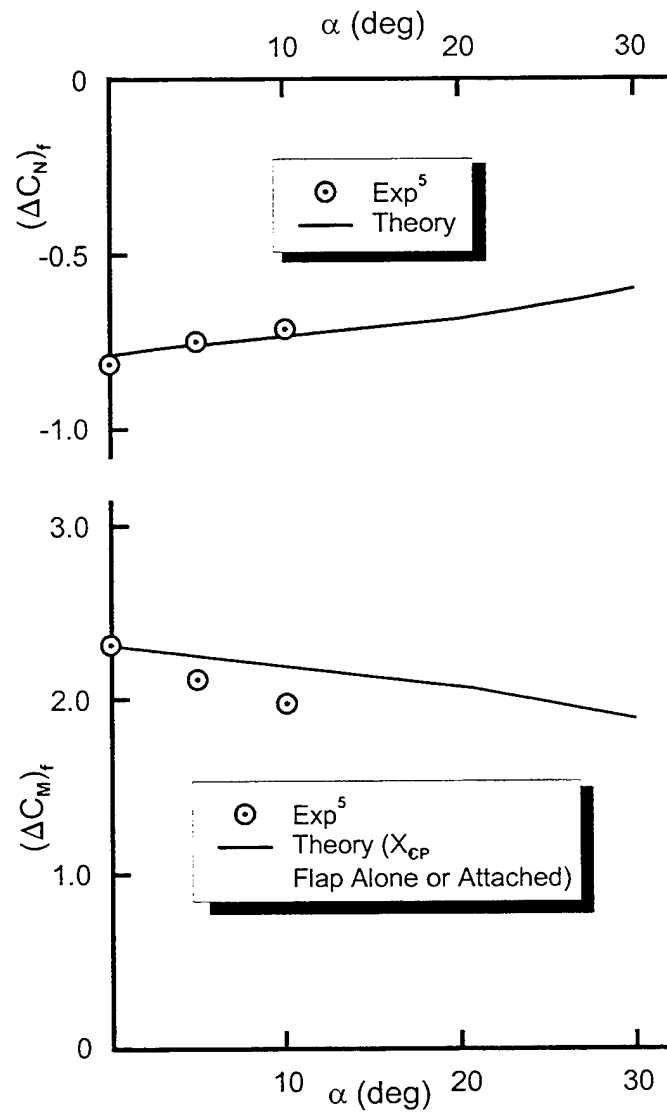


FIGURE 9. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.5$ ,  $\delta_f = -20$  DEG)



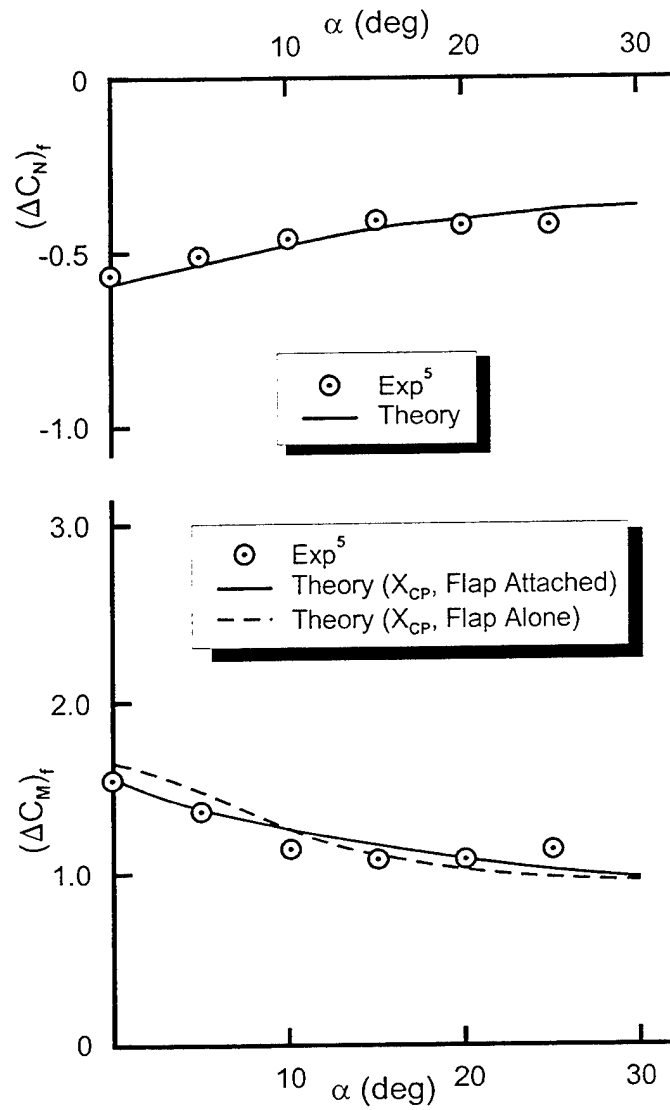


FIGURE 10. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.9$ ,  $\delta_f = -20$  DEG)

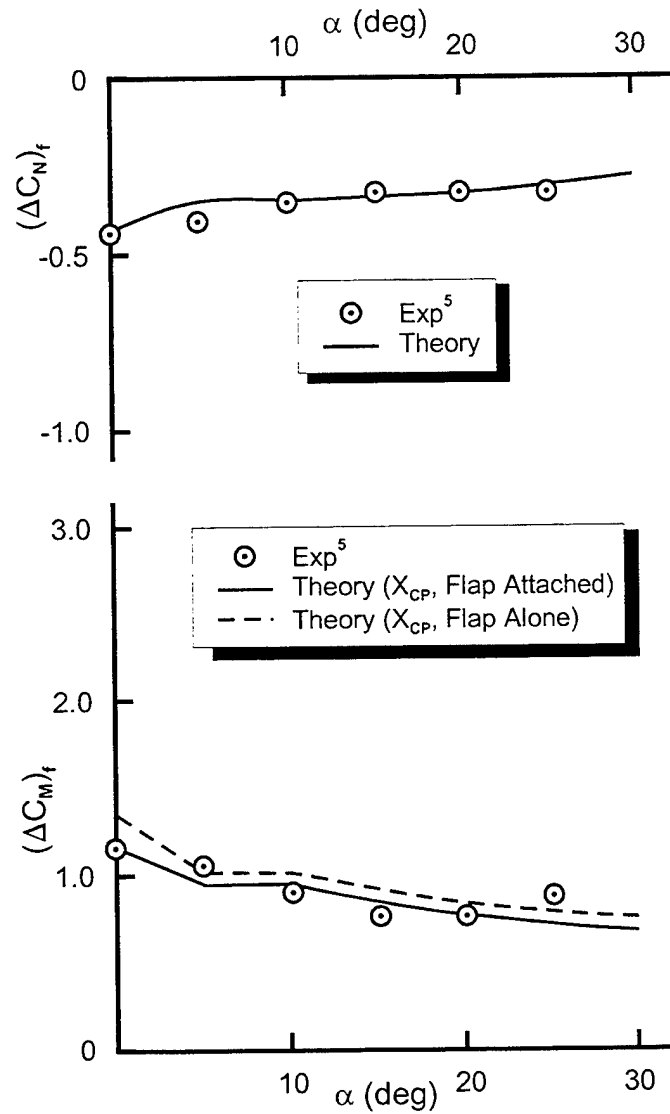


FIGURE 11. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.3$ ,  $\delta_f = -20$  DEG)

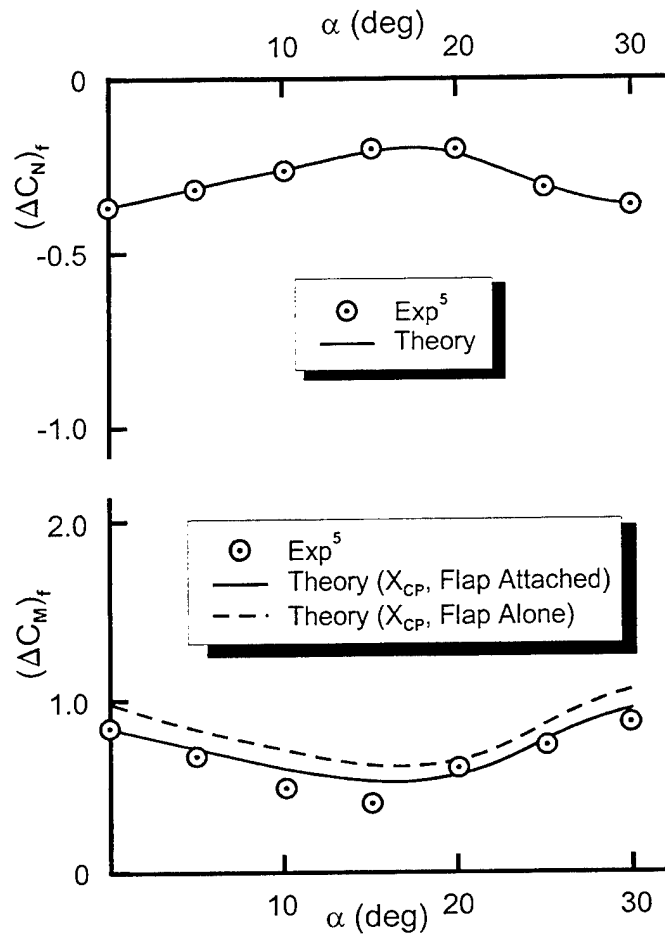


FIGURE 12. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.96$ ,  $\delta_f = -20$  DEG)

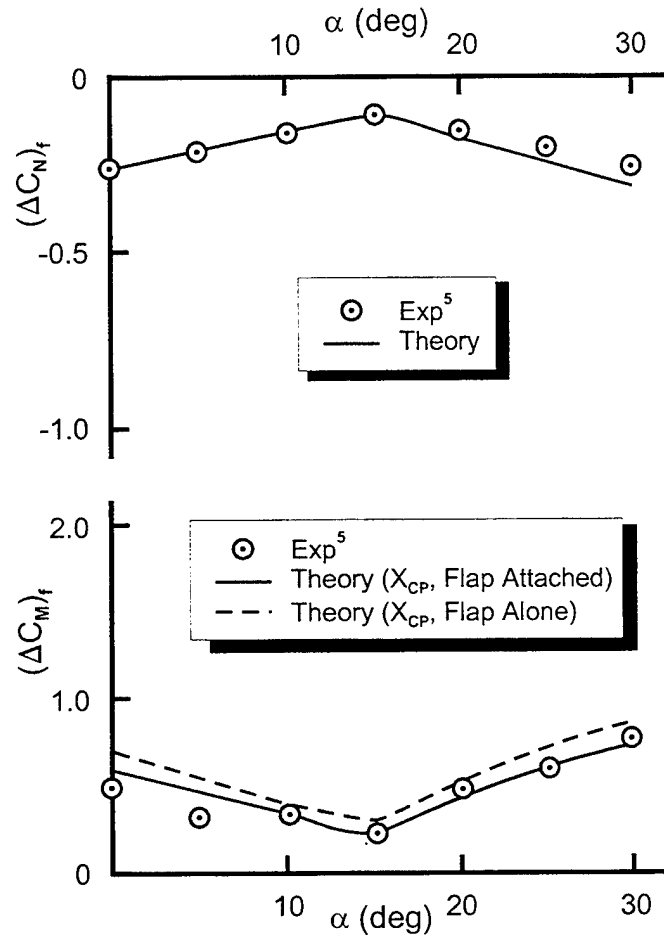


FIGURE 13. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 3.95$ ,  $\delta_f = -20^\circ$ )

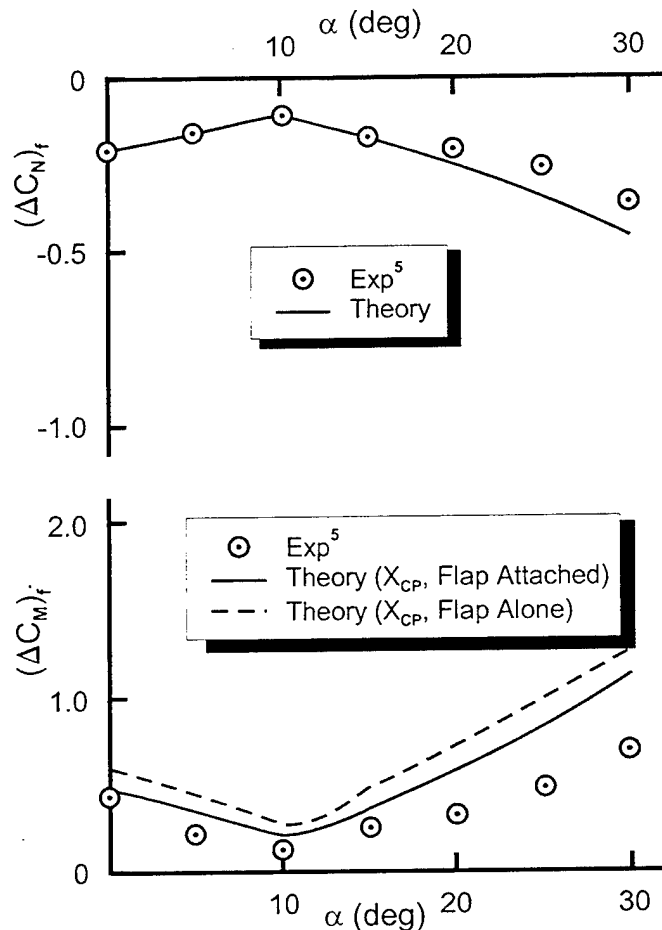


FIGURE 14. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 4.63$ ,  $\delta_f = -20$  DEG)

Figures 15-20 compare theory and experiment for  $(\Delta C_N)_f$  and  $(\Delta C_M)_f$  as a function of flap deflection at AOA 10 deg and for the Mach numbers of the Reference 5 data base. Figures 15-20 are believed to be a more realistic representation of the practical case where trim is expected to occur for  $\alpha \leq 10$  deg with the flap deflected as high as  $-30$  deg. As seen in Figures 15-20, the theory and experiment are in fairly good agreement. All pitching moment data in Figures 15-20 assume the Figure 8 center of pressure shift. Note also that the theory shows a linear variation of  $(\Delta C_N)_f$  and  $(\Delta C_M)_f$  for  $M_\infty \geq 1.5$  and  $\delta_f$  to  $-30$  deg for the small AOA of 10 deg.

Reference 6 represents the only subsonic data base the author found in the literature. The configuration tested is shown in Figure 4. The ogive of the Figure 4 configuration can be either an elliptical or a circular cylinder tangent ogive. The case upon which the change in pitching moments and normal force coefficients were determined was based on an elliptical nose. However, since the data used was  $\Delta(C_N)_f$  and  $\Delta(C_M)_f$ , it is expected the body shape will have little impact since the same body shape is used for the  $\delta_f = 0$  case as well as the  $\delta_f \neq 0$  case.

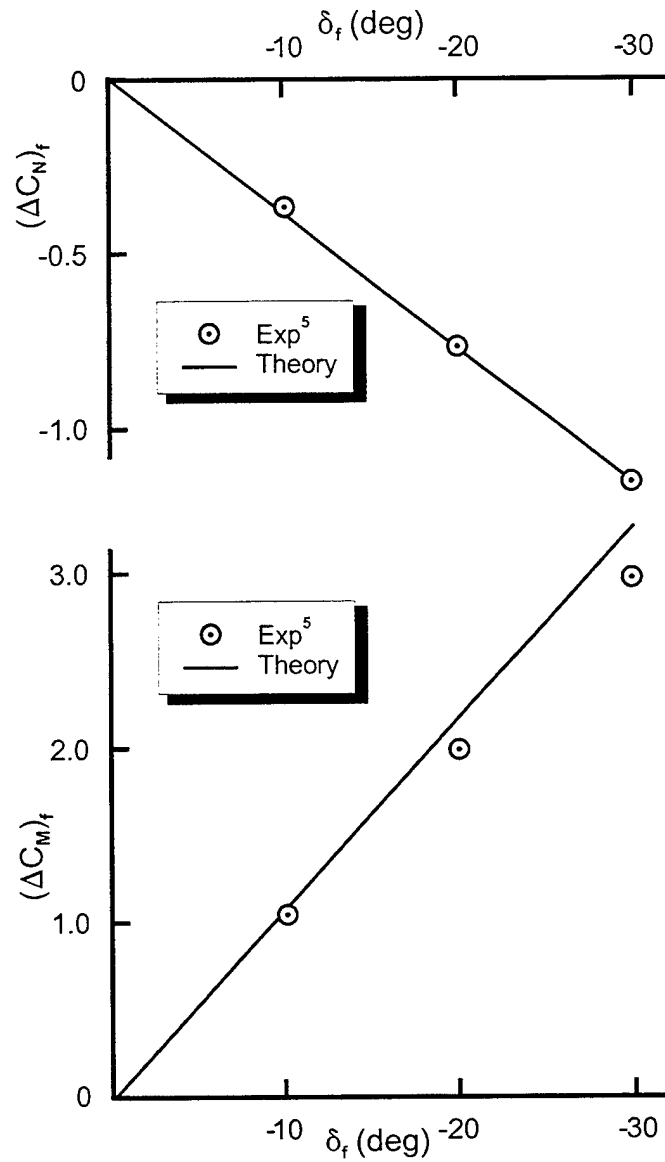


FIGURE 15. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.5$ ,  $\alpha = 10$  DEG)

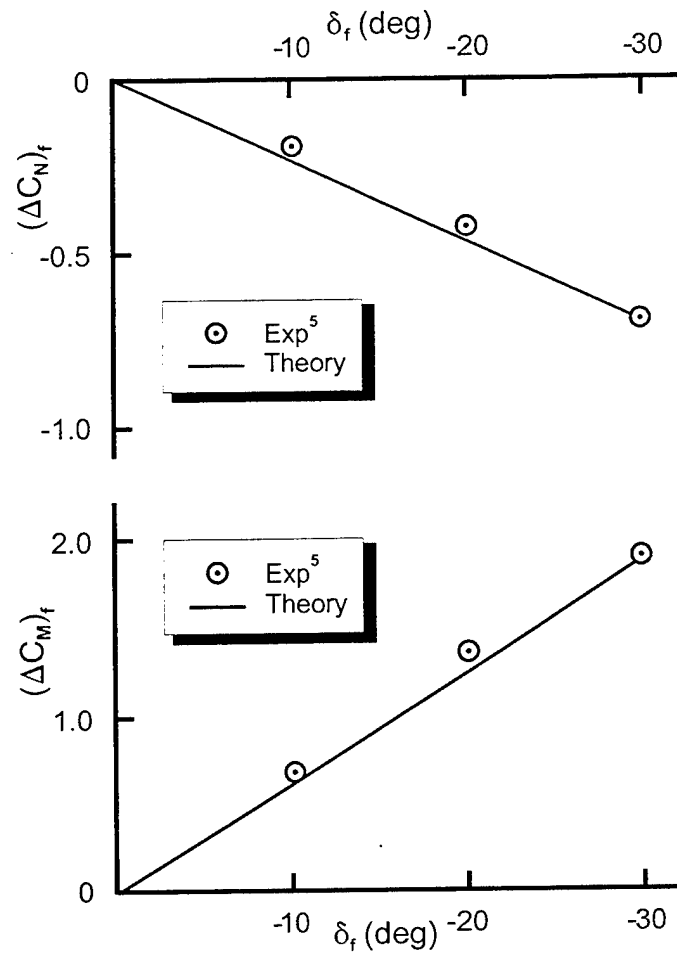


FIGURE 16. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 1.9$ ,  $\alpha = 10$  DEG)

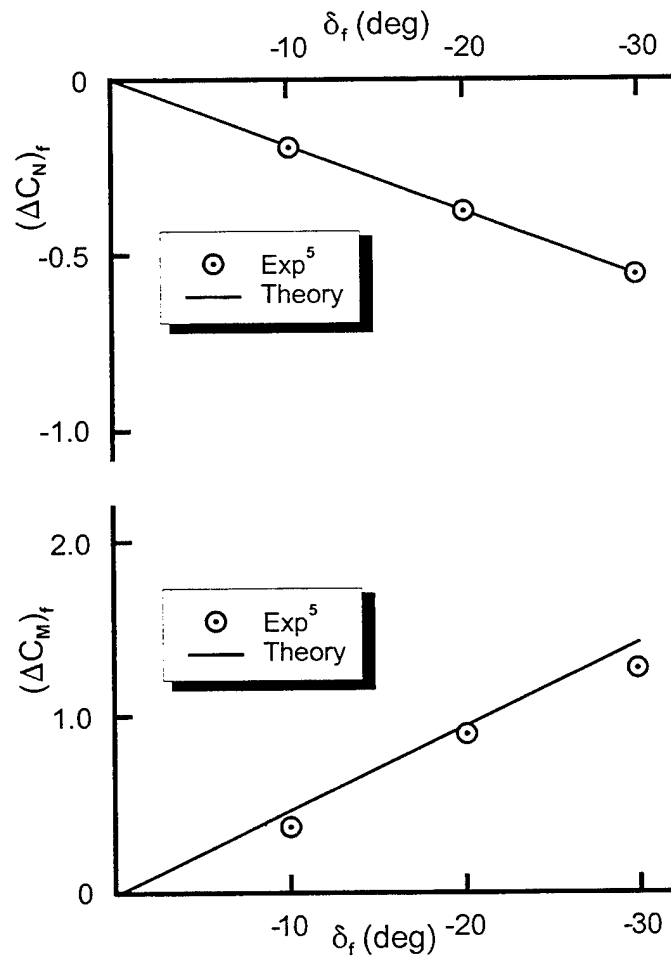


FIGURE 17. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.3$ ,  $\alpha = 10$  DEG)



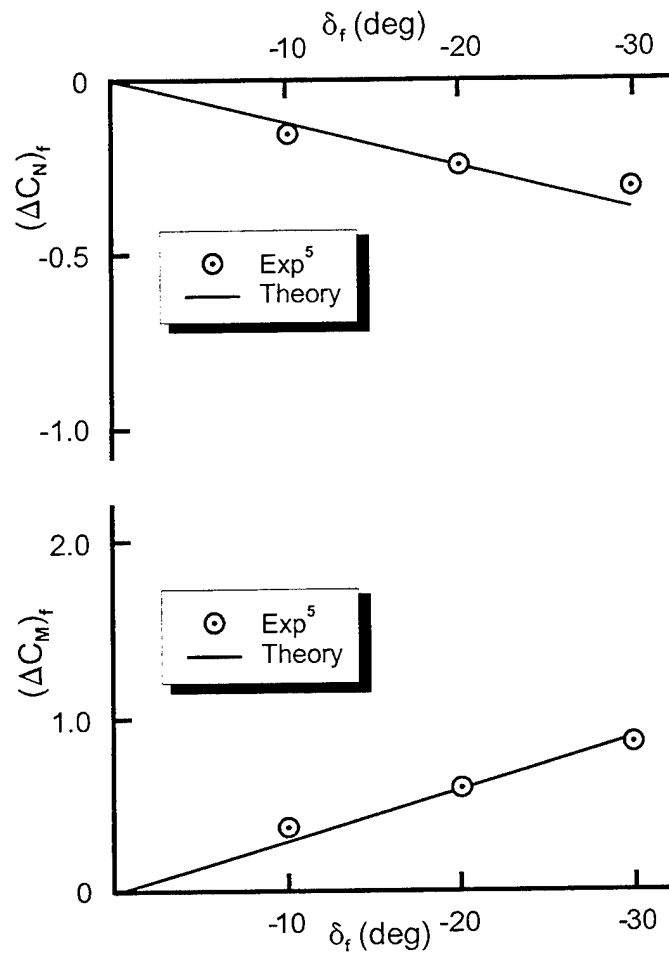


FIGURE 18. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 2.96$ ,  $\alpha = 10$  DEG)

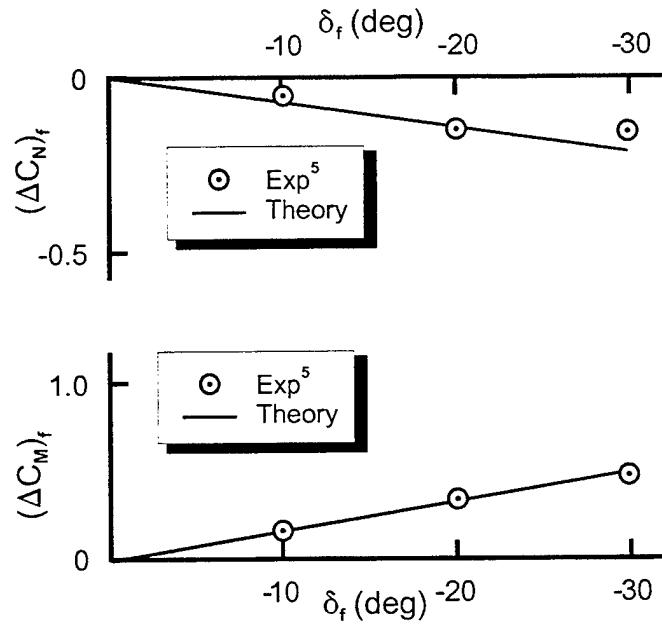


FIGURE 19. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 3.95$ ,  $\alpha = 10$  DEG)

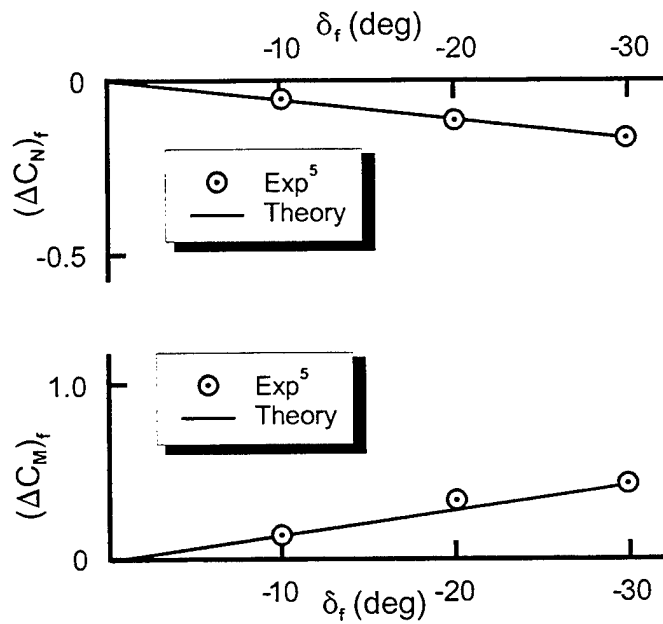


FIGURE 20. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 4.63$ ,  $\alpha = 10$  DEG)

Reference 6 has both positive and negative values of  $\delta_f$  available. Unfortunately,  $M_\infty = 0.4$  was the highest freestream Mach number considered, and AOA to 30 deg were also included in the test series.

Figure 21 compares the theory and experiment for  $\Delta(C_N)_f$  and  $\Delta(C_M)_f$  where  $\delta_f$  is negative for  $\alpha$  to 30 deg. Note excellent agreement for  $\Delta(C_N)_f$  is obtained between theory and experiment for both  $\delta_f = -10$  deg and  $-30$  deg cases. Good agreement between theory and experiment is obtained for  $\Delta(C_M)_f$  for the  $\delta_f = -10$  deg case up to  $\alpha$  of about 20 to 25 deg, where the theory and experiment start to depart. For  $\delta_f = -30$  deg, comparison of theory and experiment for  $\Delta(C_M)_f$  is quite acceptable for  $\alpha$  up to 20 deg. The trim AOA occurs at about 6 deg for  $\delta_f = -10$  deg and at about 14.8 deg for  $\delta_f = -30$  deg. In other words, good accuracy in both  $\Delta(C_N)_f$  and  $\Delta(C_M)_f$  can be obtained up to and slightly beyond the trim AOA, which is most critical. For  $\alpha$  above the trim value, accuracy of  $\Delta(C_N)_f$  and  $\Delta(C_M)_f$  is not as important, and thus no attempt was made to try to improve the theory for these conditions.

Figure 22 gives the complimentary results to the Figure 21 case except here  $\delta_f$  is positive. While trim cannot occur due to the fact  $\alpha$  and  $\delta_f$  are of the same sign and the configuration is tail controlled, it is still of interest to see how well the theory compares to data for conditions where trim is not possible. As seen in Figure 22, agreement between theory and experiment for both  $\Delta(C_N)_f$  and  $\Delta(C_M)_f$  is quite good up to an  $\alpha$  of about 15 deg. Above  $\alpha$  of 15 deg, both  $\Delta(C_M)_f$  and  $\Delta(C_N)_f$  deviate from experiment at most conditions. Again, since this is not a practical set of conditions for trim, no effect has been made to improve  $\Delta(C_N)_f$  and  $\Delta(C_M)_f$  for  $\alpha$  above 15 deg and  $\delta_f$  is positive.

Figure 23 compares the theory and experiment for axial force coefficient where the trailing edge flap has been deflected  $-10$  deg and  $-30$  deg respectively. The equivalent value of  $\delta_w$  corresponding to  $\delta_f = -10$  deg and  $-30$  deg respectively is shown at the top of Figure 23 as a function of freestream mach number. Note that  $\delta_w$  is only a small fraction of  $\delta_f$ . The wing area is 8.67 times that of the trailing edge flap. At the bottom of Figure 23 is the axial force coefficient based on the AP02 calculations plus the value defined by Equation (12). Two cases are shown for the theory: where the wind tunnel model has a boundary layer trip and where no boundary layer trip is present. The Reynolds number for the tests was  $2.5 \times 10^6$ . According to Reference 5, a boundary layer trip was present. Based on comparison of theory and experiment, it appears the boundary layer trip was effective in producing a turbulent boundary layer over the surface at the lower supersonic Mach numbers. However, at the higher supersonic Mach numbers, it appears that the flow partially transitions back to laminar over much of the body and large wing for the  $\delta = -10$  deg case. This relaminarization of the flow is speculated to be the reason the theory with no boundary layer trip option agrees closer to the wind tunnel data at high supersonic Mach number than does the theory which assumes turbulent flow over the entire surface of the model at all Mach numbers. If the above hypothesis of relaminarization of the flow is correct, the theory predicts the experimental data quite nicely. If this hypothesis is not correct, then the theory is high for Mach numbers 3.0 and greater.

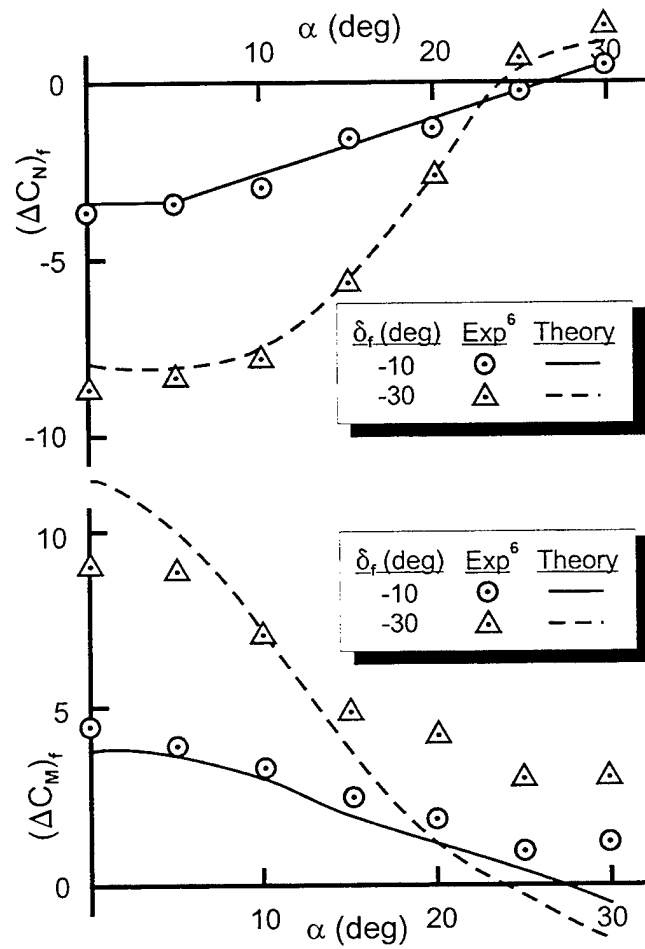


FIGURE 21. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 0.4$ ,  $\delta_f$  NEGATIVE)

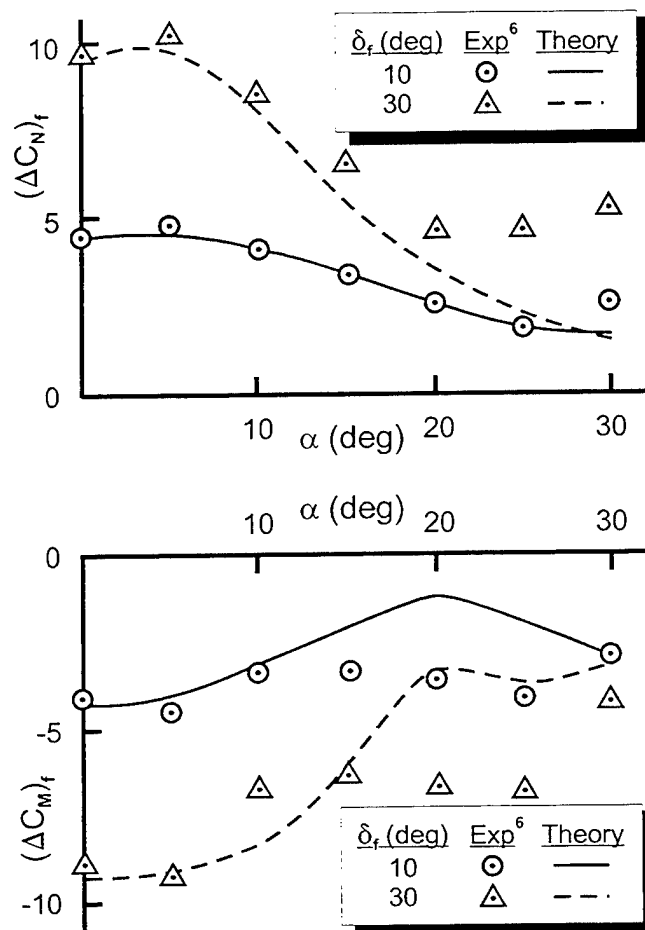


FIGURE 22. COMPARISON OF THEORY AND EXPERIMENT FOR NORMAL FORCE AND PITCHING MOMENT COEFFICIENTS OF TRAILING EDGE FLAPS ( $M_\infty = 0.4$ ,  $\delta_f$  POSITIVE)

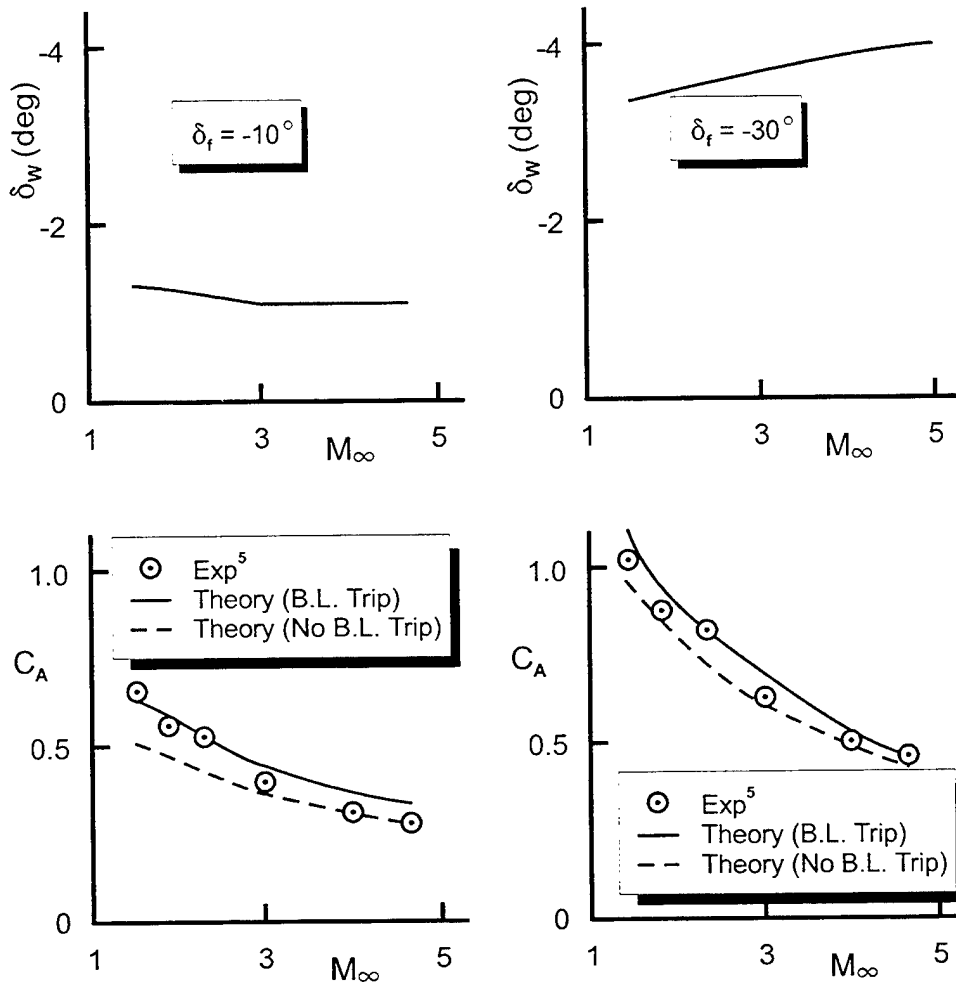


FIGURE 23. COMPARISON OF THEORY AND EXPERIMENT FOR AXIAL FORCE COEFFICIENT AT VARIOUS VALUES OF FLAP DEFLECTION AND AS REPRESENTED BY AN EQUIVALENT DEFLECTION OF ENTIRE WING AT  $\alpha = 0$  DEG ( $R_N/\text{ft} = 2.5 \times 10^6$ )

The Reference 6 data base also contained axial force data. Unfortunately, the base drag term was subtracted out, only one fin was deflected and the numbers for no fin deflection were small and irregular. As a result, it was believed an accurate value of experimental data for the axial force would be difficult to obtain and therefore no comparisons of axial force coefficient will be shown at subsonic Mach numbers.

#### 4.0 SUMMARY

An improved semiempirical method has been developed to estimate the static aerodynamics generated by a trailing edge flap. The method is based on deflecting the full wing or tail surface an amount that allows the normal force coefficient to be equal to that generated by

the flap deflected. A transfer in pitching moments is derived to account for the difference in pitching moment when a full wing versus a trailing edge flap is deflected. Also, an approximate relationship is given which accounts for the additional axial force coefficient not accounted for based on a full wing deflected a small amount versus a trailing edge flap a larger amount.

In comparing the new semiempirical method to experimental data, the following observations were made.

1. Normal force coefficient predictions at supersonic speeds were very good except at the highest Mach numbers ( $M_\infty = 4.63$ ) and AOA ( $\alpha > 25$  deg) where the predictions were only fair.
2. Pitching moment coefficient predictions at supersonic speeds were fair to good at all conditions considered ( $1.5 \leq M_\infty \leq 4.63$ ,  $0 \leq \alpha \leq 30$ ,  $-30 \leq \delta_f \leq 0$ ). The worst case agreement was again for  $M_\infty = 4.63$  and  $\alpha > 20$  deg.
3. Axial force coefficient predictions for supersonic conditions were found to be reasonable. However, the accuracy was seen to be dependent on whether the boundary layer on the wind tunnel model remained turbulent at  $M_\infty \geq 2.3$  versus returning to laminar flow over the model.
4. At subsonic flow, the only data available to the author was at  $M_\infty = 0.4$ . For this Mach number, it was found the predictions for both normal force and pitching moment coefficients were acceptable up to and slightly past the trim AOA. For larger flap deflections, the accuracy of the predictions was acceptable at AOAs that exceeded trim conditions by about 5 deg. However, since trim and slightly past trim are of the most practical interest, this problem was not seen as a major limitation.

A linear interpolation of the empirical factors used in the derivation process was assumed between Mach numbers of 0.8 and 1.5. Also values of these factors were assumed to be constant below  $M_\infty = 0.4$  and above  $M_\infty = 4.63$ , where no data was available.

Additional wind tunnel data is needed to refine and validate the new semiempirical model. Specifically, data is needed when the AOA and flap deflection are of the same sign at supersonic speeds. Data is needed for Mach numbers between 0.4 and 1.5 as well. However, until additional data becomes available, the model derived here uses engineering judgment to fill in these gaps and allows the model to be operational over the practical AOA, Mach number and control deflection range that trailing edge flaps are contemplated for use.

## 5.0 REFERENCES

1. Moore, F. G.,; McInville, R. M.; and Hymer, T., *The 1998 Version of the NSWC Aeroprediction Code: Part I – Summary of New Theoretical Methodology*, NSWCDD/TR-98/1, Apr 1998.
2. Blake, W. B. and Burns, K. A., "Missile Datcom: Recent Enhancements Including Trailing Edge Flap Effects," AIAA paper 94-0027, 32<sup>nd</sup> Aerospace Sciences Meeting, Reno, NV, Jan 1994.
3. Hoak, D. E., et al., *USAF Stability and Control DATCOM*, AFWAL TR 83-3048, Oct 1960, revised 1978.
4. Goin, K. L., *Equations and Charts for the Rapid Estimation of Hinge-Moment and Effectiveness Parameters for Trailing-Edge Controls Having Leading and Trailing Edges Swept Ahead of the Mach Lines*, NACA TR 1041, 1951.
5. Triscott, C. D., Jr., *Longitudinal Aerodynamic Characteristics at Mach 1.50 to 4.63 of a Missile Model Employing Various Canards and a Trailing-Edge Flap Control*, NASA TM X-2367, Oct 1971.
6. Baldwin, A. W. and Adamczak, D. W., *Experimental Evaluation of Aerodynamic Control Devices for Control of Tailless Fighter Aircraft*, WL-TM-92-318, Flight Dynamics Directorate, Wright Laboratory, Wright Patterson AFB, OH 45433-6553, Apr 1992.



## 6.0 SYMBOLS AND DEFINITIONS

|  |  |
|--|--|
| AOA  | Angle of Attack  |
| APC  | Aeroprediction Code  |
| AP02, AP98                                       | 2002 and 1998 versions of the APC respectively   |
| AR   | Aspect Ratio = $b^2/A_w$   |
| NASA/LRC   | National Aeronautics and Space Administration/Langley Research Center  |
| NSWCDD   | Naval Surface Warfare Center, Dahlgren Division  |
| $A_{REF}$  | Reference area (maximum cross-sectional area of body, if a body is present, or planform area of wing, if wing alone)(ft <sup>2</sup> ) |
| $A_w$  | Planform area of wing in crossflow plane (ft <sup>2</sup> )  |
| b  | Wing span (not including body)(ft)   |
| $C_A$  | Axial force coefficient  |
| $(\Delta C_A)_f, (\Delta C_N)_f, (\Delta C_M)_f$ | Change in axial, normal and pitching moment coefficients respectively due to a flap deflection $\delta_f$                              |
| $C_M$  | Pitching moment coefficient (based on reference area and body diameter, if body present, or mean aerodynamic chord, if wing alone)     |
| $C_N$  | Normal-force coefficient   |
| $C_{N_{B(W)}}, C_{N_{B(T)}}$                     | Normal-force coefficient on body in presence of wing or tail   |
| $(C_{N_\alpha})_W, (C_{N_\alpha})_T$             | Normal-force coefficient slope of wing and tail respectively   |
| $C_{N_W}$  | Normal-force coefficient of wing alone   |

|                              |   |
|------------------------------|---|
| $C_{N_{W(B)}}, C_{N_{T(B)}}$ | Normal-force coefficient of wing or tail in presence of body  |
| $C_{N_\alpha}$               | Normal-force coefficient derivative   |
| $c_r$                        | Rood chord (ft)   |
| $c_{r_w}, c_{r_f}$           | Root chord of wing and flap respectively (ft)   |
| $c_t$                        | Tip chord (ft)  |
| cal                          | Caliber(s) (one body diameter)  |
| $d_B$                        | Body diameter (ft) at base  |
| $d_{ref}$                    | Reference body diameter (ft)  |
| deg                          | Degree(s)   |
| $f_1, f_2, f_3$              | Empirical factors used in defining the semiempirical model for flap aerodynamics  |
| $k_{B(W)}, k_{B(T)}$         | Ratio of additional body normal-force coefficient due to presence of wing or tail at a control deflection to that of wing or tail alone at $\alpha = 0$ deg |
| $k_{W(B)}, k_{T(B)}$         | Ratio of wing or tail normal-force coefficient in presence of body due to a control deflection to that of wing or tail alone at $\alpha = 0$ deg            |
| $\ell, \ell_n$               | Total length and nose length respectively (ft)  |
| $\ell_{ref}$                 | Reference length (ft)   |
| $M_{W(B)}, M_{B(W)}$         | Moment of wing in presence of body and body in presence of wing respectively (ft – lb)  |
| $M_\infty$                   | Freestream Mach number  |
| $N_{W(B)}, N_{B(W)}$         | Normal force of wing in presence of body and body in presence of wing respectively (lb)   |
| $N_f$                        | Normal force of trailing edge flap (lb)   |
| $p$                          | Pressure (lb/ft <sup>2</sup> )  |
| $Q$                          | Dynamic pressure (lb/ft <sup>2</sup> )  |

|                      |  |
|----------------------|--|
| $r$                  | Local body radius (ft)   |
| $r_{LE}, r_{TE}$     | Radius of leading and trailing edges of fin respectively (ft)  |
| $r_n$                | Nose radius (ft)   |
| $R_N$                | Reynolds number  |
| $t$                  | Fin thickness (ft)   |
| $V_\infty$           | Freestream velocity (ft/sec)   |
| $X_{LE}, X_{CG}$     | Distance from nose tip to wing leading edge or center of gravity of body respectively (ft)   |
| $X_{CP}$             | Center of pressure (in feet or calibers from some reference point that can be specified) in x direction  |
| $X_{ref}$            | Reference location along x axis for moments (ft)   |
| $x, y, z$            | Axis system fixed with x along centerline of body  |
| $\alpha$             | Angle of attack (deg)  |
| $\alpha_{TR}$        | Trim angle of attack (deg)   |
| $\Lambda_{LE}$       | Leading edge sweepback angle of fin (deg)  |
| $\delta_f$           | Control deflection (deg) of trailing edge flap, positive leading edge up   |
| $\delta_w, \delta_T$ | Deflection of wing or tail surfaces (deg), positive leading edge up  |
| $\Phi$               | Roll position of missile fins ( $\Phi = 0$ deg corresponds to fins in the plus (+) orientation). $\Phi = 45$ deg corresponds to fins rolled to the cross (×) orientation |
| $\lambda$            | Taper ratio of a lifting surface = $c_t/c_r$   |

## DISTRIBUTION

|                                | <u>Copies</u> |                                      | <u>Copies</u> |
|--------------------------------|---------------|--------------------------------------|---------------|
| <b>DOD ACTIVITIES (CONUS)</b>  |               | ATTN T C TAI                         | 1             |
|                                |               | M J MALIA                            | 1             |
| ATTN CODE 35 (ZIMET)           | 1             | TECHNICAL LIBRARY                    | 1             |
| CODE 351 (MORRISON)            | 1             | COMMANDER                            |               |
| CODE 351 (GRAFF)               | 1             | NSWC                                 |               |
| CODE 332FD (LEKODIS)           | 1             | CARDEROCK DIVISION                   |               |
| CHIEF OF NAVAL RESEARCH        |               | WASHINGTON DC 20034                  |               |
| BALLSTON CENTRE TOWER ONE      |               |                                      |               |
| 800 NORTH QUINCY ST            |               | ATTN R M HOWARD                      | 1             |
| ARLINGTON VA 22217-5660        |               | TECHNICAL LIBRARY                    | 1             |
|                                |               | SUPERINTENDENT                       |               |
| ATTN CODE 474T60D (LOFTUS)     | 1             | NAVAL POSTGRADUATE SCHOOL            |               |
| CODE 4732H0D (SMITH)           | 1             | 1 UNIVERSITY CIRCLE                  |               |
| CODE 473C00D (PORTER)          | 1             | MONTEREY CA 93943-5001               |               |
| CODE 47H000D (BOSS)            | 1             |                                      |               |
| CODE 473C00D (MCMANIGAL)       | 1             | ATTN HEAD WEAPONS DEPT               | 1             |
| CODE 473110D (HOUSH)           | 1             | HEAD SCIENCE DEPT                    | 1             |
| CODE 473110D (GLEASON)         | 1             | SUPERINTENDENT                       |               |
| CODE 4722E0D (JETER)           | 1             | UNITED STATES NAVAL ACADEMY          |               |
| TECHNICAL LIBRARY              | 1             | 121 BLAKE RD                         |               |
| COMMANDER                      |               | ANNAPOLIS MD 21402-5000              |               |
| NAVAL AIR WARFARE CENTER       |               |                                      |               |
| WEAPONS DIVISION               |               | ATTN DIAG DT 4T (PAUL MURAD)         | 2             |
| 1 ADMINISTRATION CIRCLE        |               | DIRECTOR                             |               |
| CHINA LAKE CA 93555-6001       |               | DEFENSE INTELLIGENCE AGENCY          |               |
|                                |               | WASHINGTON DC 20301                  |               |
| ATTN TECHNICAL LIBRARY         | 1             |                                      |               |
| G RUDACILLE PMS 38012 7        | 1             | ATTN BRENT WAGGONER                  | 1             |
| COMMANDER                      |               | CODE 4072 BLDG 2540                  |               |
| NAVAL SEA SYSTEMS COMMAND      |               | NAVAL WEAPONS SUPPORT CENTER         |               |
| 2531 JEFFERSON DAVIS HWY       |               | CRANE IN 47522-5000                  |               |
| ARLINGTON VA 22242-5160        |               |                                      |               |
|                                |               | ATTN W T RITTER                      | 1             |
| ATTN TECHNICAL LIBRARY         | 1             | DEPT OF AIR FORCE                    |               |
| COMMANDER                      |               | 846 <sup>TH</sup> TEST SQUADRON TGTM |               |
| NAVAL AIR SYSTEMS COMMAND      |               | 1521 TEST TRACK RD                   |               |
| 47122 LILJENCRANTZ ROAD UNIT 7 |               | HOFFMAN AFB NM 88330-7847            |               |
| PATUXENT RIVER MD 20670-5440   |               |                                      |               |

**DISTRIBUTION (Continued)**

|                                | <u>Copies</u> |                                   | <u>Copies</u> |
|--------------------------------|---------------|-----------------------------------|---------------|
| ATTN CODE 5252P (KRAUSE)       | 1             | ATTN H HUDGINS                    | 1             |
| TECHNICAL LIBRARY              | 1             | G FRIEDMAN                        | 1             |
| COMMANDER                      |               | AMSTA-AR-WEL-TL                   | 1             |
| INDIAN HEAD DIVISION           |               | COMMANDER                         |               |
| NAVAL SURFACE WARFARE CENTER   |               | US ARMY TACOM-ARDEC               |               |
| 101 STRAUSS AVE                |               | BUILDING 59 PHIPPS ROAD           |               |
| INDIAN HEAD MD 20640-5035      |               | PICATINNY ARSENAL NJ 07806-5000   |               |
| ATTN TECHNICAL LIBRARY         | 1             | ATTN R PUHALLA JR                 | 1             |
| COMMANDING GENERAL             |               | W STUREK                          | 1             |
| MARINE CORPS COMBAT            |               | C NIETUBICZ                       | 1             |
| DEVELOPMENT COMMAND            |               | A MIKHAIL                         | 1             |
| 2048 SOUTH ST                  |               | P PLOSTINS                        | 1             |
| QUANTICO VA 22134-5129         |               | TECHNICAL LIBRARY                 | 1             |
| ATTN E SEARS                   | 1             | COMMANDING GENERAL                |               |
| L E LIJEWSKI                   | 1             | BALLISTIC RESEARCH LABORATORY     |               |
| C COTTRELL                     | 1             | ABERDEEN PROVING GROUND           |               |
| TECHNICAL LIBRARY              | 1             | ABERDEEN MD 21005-5066            |               |
| AFATL (ADLRA) (DLGC)           | 1             | ATTN DIRECTOR                     | 1             |
| EGLIN AFB FL 32542-5000        |               | INTERCEPTOR TECHNOLOGY            |               |
| ATTN TECHNICAL LIBRARY         | 1             | BALLISTIC MISSILE DEFENSE OFFICE  |               |
| USAF ACADEMY                   |               | THE PENTAGON                      |               |
| COLORADO SPRINGS CO 80912      |               | WASHINGTON DC 20350               |               |
| ATTN B BLAKE (BLD 146)         | 1             | ATTN SFAE SD ASP                  | 1             |
| J JENKINS (BLD 146)            | 1             | SFAE SD HED                       | 1             |
| TECHNICAL LIBRARY              | 1             | DEPUTY COMMANDER                  |               |
| COMMANDING OFFICER             |               | US ARMY STRATEGIC DEFENSE COMMAND |               |
| AFSC                           |               | P O BOX 1500                      |               |
| 2210 8TH STREET                |               | HUNTSVILLE AL 35807-3801          |               |
| WRIGHT PATTERSON AFB OH 45433  |               | ATTN D WASHINGTON                 | 1             |
| ATTN JIM SIMON                 | 1             | W WALKER                          | 1             |
| NAIC TANW                      |               | R KRETZSCHMAR                     | 1             |
| HQ NAIC TANW                   |               | D FERGUSON JR                     | 1             |
| 4180 WATSON WAY                |               | COMMAND GENERAL                   |               |
| WPAFB OH 45433-5623            |               | US ARMY AVIATION AND MISSILE      |               |
| ATTN J USSELTON                | 1             | COMMAND                           |               |
| W B BAKER JR                   | 1             | AMSAM RD SS AT                    |               |
| TECHNICAL LIBRARY              | 1             | REDSTONE ARSENAL AL 35898-5252    |               |
| ARNOLD ENGINEERING DEVELOPMENT |               | DEFENSE TECHNICAL INFORMATION     |               |
| CENTER USAF                    |               | CENTER                            |               |
| TULLAHOMA TN 37389             |               | 8725 JOHN J KINGMAN ROAD          |               |
|                                |               | SUITE 0944                        |               |
|                                |               | FORT BELVOIR VA 22060-6218        | 2             |

**DISTRIBUTION (Continued)**

|                                 | <u>Copies</u> |                                    | <u>Copies</u> |
|---------------------------------|---------------|------------------------------------|---------------|
| DIRECTOR                        |               | ATTN DR ALAN NICHOLSON MSC 5B      | 1             |
| DEFENSE PRINTING SERVICE        |               | DEFENSE INTELLIGENCE AGENCY        |               |
| BLDG 176 WASHINGTON NAVY YARD   |               | MISSILE AND SPACE INTELLIGENCE CTR |               |
| 901 M ST E                      |               | REDSTONE ARSENAL AL 35898-5500     |               |
| WASHINGTON DC 20374-5087        | 1             |                                    |               |
| ATTN CODE A76                   |               | ATTN EDWARD HERBERT                | 1             |
| TECHNICAL LIBRARY               | 1             | US ARMY MISSILE COMMAND            |               |
| COMMANDING OFFICER              |               | AMSMI RD MG GA                     |               |
| CSSDD NSWC                      |               | BLDG 5400 ROOM 250                 |               |
| 6703 W HIGHWAY 98               |               | REDSTONE ARSENAL AL 35898          |               |
| PANAMA CITY FL 32407-7001       |               |                                    |               |
| ATTN DR P WEINACHT              | 1             | ATTN PAUL KOLODZIEJ                | 1             |
| AERODYNAMICS BRANCH             |               | NASA AMES RESEARCH CENTER          |               |
| PROPULSION AND FLIGHT DIV WTD   |               | MS 234 1                           |               |
| AMSRL WT PB                     |               | MOFFETT FIELD CA 94035             |               |
| US ARMY RESEARCH LAB ABERDEEN   |               |                                    |               |
| PROVING GROUND MD 21005-5066    |               | ATTN LCDR T HARTLINE USNR R        | 1             |
|                                 |               | NR ONI 2109 NAVAL RESERVE UNIT     |               |
|                                 |               | 112 CRESTVIEW CIRCLE               |               |
|                                 |               | MADISON AL 35758                   |               |
| ATTN GREGG ABATE                | 1             |                                    |               |
| US AIR FORCE                    |               | ATTN CODE 4732HOD DAVID HALL       | 1             |
| WRIGHT LABORATORY               |               | PROPULSION PERFORMANCE OFFICE      |               |
| WL MNAA                         |               | NAVAL AIR WARFARE CTR WEAPONS DIV  |               |
| 101 W EGLIN BLVD STE 219        |               | 1 ADMINISTRATIVE CIR               |               |
| EGLIN AFB FL 32542-5000         |               | CHINA LAKE CA 93555-6001           |               |
|                                 |               |                                    |               |
| ATTN JOHN GRAU                  | 1             | ATTN DONALD SHEREDA                | 1             |
| US ARMY ARDEC                   |               | WL FIMA BLDG 450                   |               |
| COMMANDER US ARMY ARDEC         |               | 2645 FIFTH ST STE 30               |               |
| AMSTA AR FSF T BLDG 382         |               | WRIGHT PATTERSON AFB OH 45433-7936 |               |
| PICATINNY ARSENAL NJ 07806-5000 |               |                                    |               |
|                                 |               | BMDO AQS                           |               |
| ATTN FRANK MACDONALD            | 1             | 1725 JEFFERSON DAVIS HWY STE 809   |               |
| NAWC CHINA LAKE                 |               | ARLINGTON VA 22202                 | 1             |
| COMMANDER                       |               |                                    |               |
| CODE 473120D                    |               | ATTN JEFFREY RANDORF               | 1             |
| NAVAIRWARCENNSDNDIV             |               | US ARMY SPACE AND STRATEGIC        |               |
| CHINA LAKE CA 93555             |               | DEFENSE COMMAND                    |               |
|                                 |               | P O BOX 1500 CSSD-BC-SS            |               |
| ATTN MARK LAMBERT               | 1             | 106 WYNN DRIVE                     |               |
| NAWC                            |               | HUNTSVILLE AL 35807-3801           |               |
| CODE 4732HOD                    |               |                                    |               |
| CHINA LAKE CA 93555             |               | ATTN EDWARD ELLISON                | 1             |
|                                 |               | WHITE SANDS MISSILE RANGE          |               |
| ATTN MICHAEL MUSACHIO           | 1             | NRO DA F                           |               |
| DIRECTOR                        |               | WHITE SANDS MISSILE RANGE NM 88002 |               |
| OFFICE OF NAVAL INTELLIGENCE    |               |                                    |               |
| 4251 SUITLAND ROAD (ONI 2321)   |               |                                    |               |
| WASHINGTON DC 20395             |               |                                    |               |

## DISTRIBUTION (Continued)

|                                 | <u>Copies</u> |                                   | <u>Copies</u> |
|---------------------------------|---------------|-----------------------------------|---------------|
| ATTN MATT THOMAS                | 1             | ATTN KENNARD WATSON               | 1             |
| LAMAR M AUMAN                   | 1             | NSWC COASTAL SYSTEMS STATION      |               |
| US ARMY AVIATION AND MISSILE    |               | CODE R11                          |               |
| COMMAND                         |               | 6703 W HWY 98                     |               |
| AMSAM RD SS AT                  |               | PANAMA CITY FL 32407-7001         |               |
| REDSTONE ARSENAL AL 35898-5252  |               |                                   |               |
| ATTN JEFF OBERMARK              | 1             | ATTN FRANK J REGAN                | 1             |
| US ARMY AVIATION AND MISSILE    |               | NSWCDD                            |               |
| COMMAND                         |               | NAVAL SECURITY STATION            |               |
| ASAM AR E S W                   |               | 3801 NEBRASKA AVE                 |               |
| BLDG 5681 ROOM 223              |               | WASHINGTON DC                     |               |
| REDSTONE ARSENAL AL 35898-5000  |               |                                   |               |
|                                 |               | <b>NON-DOD ACTIVITIES (CONUS)</b> |               |
| ATTN BILL SCHOENFELD            | 1             | NICHOLS RESEARCH CORPORATION      |               |
| USAF AFMC 46TG 846TS TGTM       |               | MS 912                            |               |
| 846TH TEST SQUADRON TGTM        |               | P O BOX 400002                    |               |
| 1521 TEST TRACK RD              |               | 4040 S MEMORIAL PKWY              |               |
| HOLLOMAN AFB NM 88330-7847      |               | HUNTSVILLE AL 35815-1502          | 1             |
| ATTN RAYMOND TROHANOWSKY        | 1             | THE CNA CORPORATION               |               |
| TACOM ARDEC DEPT OF ARMY        |               | P O BOX 16268                     |               |
| BUILDING 382 SOUTH              |               | ALEXANDRIA VA 22302-0268          | 1             |
| PICATINNY ARSENAL NJ 07806-5000 |               |                                   |               |
| ATTN MICHAEL ADAMS              | 1             | GIDEP OPERATIONS OFFICE           |               |
| CIA                             |               | CORONA CA 91720                   | 1             |
| 5N01 NHB                        |               |                                   |               |
| WASHINGTON DC 20505             |               | ATTN TECHNICAL LIBRARY            | 1             |
|                                 |               | NASA AMES RESEARCH CENTER         |               |
| ATTN HUGO GONZALEZ              | 1             | MOFFETT CA 94035-1099             |               |
| NAV AIR (AIR 4 3 2 2)           |               |                                   |               |
| AERODYNAMICS PERFORMANCE        |               | ATTN C SCOTT                      | 1             |
| NAVAIRSYSCOM                    |               | D CURRY                           | 1             |
| 48110 SHAW RD UNIT 5            |               | NASA JOHNSON SPACE CENTER         |               |
| PATUXENT RIVER MD 20670-1906    |               | HOUSTON TX 77058                  |               |
| ATTN LT KATHERINE D GARON       | 1             | ATTN TECHNICAL LIBRARY            | 1             |
| AFRL MNAV EGLIN AFB             |               | NASA                              |               |
| 101 W EGLIN SUITE 332           |               | WASHINGTON DC 20546               |               |
| FORT WALTON BEACH FL 32542-6810 |               |                                   |               |
| ATTN DAVID TASSIA CODE 4410     | 1             | ATTN B HENDERSON                  | 1             |
| NSWCIHD BLDG 301                |               | D MILLER                          | 1             |
| 101 STRAUSS AVE                 |               | J ALLEN                           | 1             |
| INDIAN HEAD MD 20640-5035       |               | F WILCOX                          | 1             |
|                                 |               | TECHNICAL LIBRARY                 | 2             |
|                                 |               | NASA LANGLEY RESEARCH CENTER      |               |
|                                 |               | HAMPTON VA 23365                  |               |

**DISTRIBUTION (Continued)**

|   | <u>Copies</u> |   | <u>Copies</u> |
|---|---------------|---|---------------|
| ATTN DR K JONES<br>NASA MARSHALL SPACE FLIGHT CTR<br>CODE TD63<br>MSFC AL 35812   | 1             | ATTN GERMAN MILITARY REP US OA<br>GMR TRAFFIC AND TRANSPORTATION<br>DIVISION<br>10 SERVICES ROAD<br>DULLES INTERNATIONAL AP<br>WASHINGTON DC 20041  | 1             |
| ATTN D G MILLER (L 219)<br>TECHNICAL LIBRARY  | 1             |   |               |
| LAWRENCE LIVERMORE NATIONAL<br>LABORATORY<br>EARTH SCIENCES DIVISION<br>UNIVERSITY OF CALIFORNIA<br>P O BOX 808<br>LIVERMORE CA 94551 | 1             | ATTN PROF F R DEJARNETTE<br>NORTH CAROLINA STATE UNIVERSITY<br>DEPT OF MECHANICAL AND<br>AEROSPACE ENGINEERING<br>BOX 7921<br>RALEIGH NC 27695      | 1             |
| ATTN DR F MOORE<br>AEROPREDICTION INC<br>12341 MILLBANK RD<br>KING GEORGE VA 22485  | 3             | ATTN PROF J A SCHETZ<br>VIRGINIA POLYTECHNIC AND STATE<br>UNIVERSITY<br>DEPT OF AEROSPACE ENGINEERING<br>BLACKSBURG VA 24060                        | 1             |
| ATTN W RUTLEDGE (1635)<br>R LAFARGE   | 1             | ATTN J M WU   | 1             |
| R EISLER  | 1             | C BALASUBRAMAYAN  | 1             |
| TECHNICAL LIBRARY   | 1             | TECHNICAL LIBRARY   | 1             |
| SANDIA NATIONAL LABORATORY<br>P O BOX 5800<br>ALBUQUERQUE NM 87185-5800   |               | THE UNIVERSITY OF TENNESSEE<br>SPACE INSTITUTE<br>TULLAHOMA TN 37388  |               |
| ATTN WALT GUTIERREZ<br>SANDIA NATIONAL LABORATORIES<br>MAIL STOP 0825<br>P O BOX 5800<br>ALBUQUERQUE NM 87185-0825                    | 1             | ATTN R NELSON<br>TECHNICAL LIBRARY<br>UNIVERSITY OF NOTRE DAME<br>DEPT OF AEROSPACE AND<br>MECHANICAL ENGINEERING<br>BOX 537<br>NOTRE DAME IN 46556 | 1<br>1        |
| ATTN ASSISTANT DEFENSE<br>COOPERATION ATTACHE   | 1             | ATTN PROF F NELSON<br>DEPT OF MECH AND AERO ENG<br>UNIVERSITY OF MISSOURI ROLLA<br>ROLLA MO 65401   | 1             |
| EMBASSY OF SPAIN<br>WASHINGTON DC 20016   |               |   |               |
| DE/AVT<br>DEFENSE EQUIPMENT STAFF<br>BRITISH EMBASSY<br>3100 MASSACHUSETTS AVE NW<br>WASHINGTON DC 20008-3688                         | 1             | ATTN ROBERT ENGLAR<br>GEORGIA TECH RESEARCH INSTITUTE<br>AEROSPACE SCIENCE AND<br>TECHNOLOGY LAB<br>ATLANTA GA 30332                                | 1             |
| ATTN ASO LO IS<br>ISRAEL AIR FORCE<br>LIAISON OFFICER<br>700 ROBBINS AVE<br>PHILADELPHIA PA 19111                                     | 1             |   |               |



## DISTRIBUTION (Continued)

|                                | <u>Copies</u> |                                    | <u>Copies</u> |
|--------------------------------|---------------|------------------------------------|---------------|
| ATTN E LUCERO                  | 1             | ATTN T LUNDY                       | 1             |
| D FROSTBUTTER                  | 1             | D ANDREWS                          | 1             |
| L PERINI                       | 1             | TECHNICAL LIBRARY                  | 1             |
| TECHNICAL LIBRARY              | 1             | LOCKHEED MISSILES AND SPACE CO INC |               |
| APPLIED PHYSICS LABORATORY     |               | P O BOX 1103                       |               |
| JOHNS HOPKINS UNIVERSITY       |               | HUNTSVILLE AL 35807                |               |
| JOHNS HOPKINS ROAD             |               |                                    |               |
| LAUREL MD 20723-6099           |               | ATTN W CHRISTENSON                 | 1             |
|                                |               | D WARNER                           | 1             |
| ATTN B BROOKS                  | 1             | ALLIANT TECHSYSTEMS INC            |               |
| R STANCIL                      | 1             | 600 SECOND ST NE                   |               |
| R ELKINS                       | 1             | HOPKINS MN 55343                   |               |
| LORAL VOUGHT SYSTEMS           |               | ATTN TECHNICAL LIBRARY             | 1             |
| P O BOX 650003                 |               | B SALEMI                           | 1             |
| M S EM 55                      |               | J BOUDREAU                         | 1             |
| DALLAS TX 75265-0003           |               | RAYTHEON COMPANY                   |               |
|                                |               | MISSILE SYSTEMS DIVISION           |               |
| ATTN PROF J D ANDERSON         | 1             | P O BOX 1201                       |               |
| DEPT OF AEROSPACE ENGINEERING  |               | TEWKSBURY MA 01876-0901            |               |
| UNIVERSITY OF MARYLAND         |               |                                    |               |
| COLLEGE PARK MD 20742          |               | ATTN JOSEPH ANDRZEJEWSKI           | 1             |
| ATTN TECHNICAL LIBRARY         | 1             | MEVATEC CORP                       |               |
| HUGHES MISSILE SYSTEMS COMPANY |               | 1525 PERIMETER PARKWAY             |               |
| P O BOX 11337 BLDG 802 MS A1   |               | SUITE 500                          |               |
| OLD NOGALES HWY                |               | HUNTSVILLE AL 35806                |               |
| TUCSON AZ 83734-1337           |               |                                    |               |
| ATTN M DILLENUS                | 1             | ATTN DR G S SCHMIDT                | 1             |
| NIELSEN ENGINEERING AND        |               | LORAL DEFENSE SYSTEMS              |               |
| RESEARCH INC                   |               | 1210 MASSILLON ROAD                |               |
| 526 CLYDE AVE                  |               | AKRON OH 44315-0001                |               |
| MOUNTAIN VIEW CA 95043         |               | ATTN TECH LIBRARY                  | 1             |
| ATTN J WILLIAMS                | 1             | AEROJET ELECTRONIC SYSTEMS         |               |
| S VUKELICH                     | 1             | P O BOX 296 III                    |               |
| J FIVEL                        | 1             | AZUSA CA 91702                     |               |
| R GERBSCH (CODE 1111041)       | 1             | ATTN P REDING                      | 1             |
| TECHNICAL LIBRARY              | 1             | G CHRUSCIEL                        | 1             |
| MCDONNELL DOUGLAS              |               | TECHNICAL LIBRARY                  | 1             |
| ASTRONAUTICS CO (EAST)         |               | LOCKHEED MISSILES AND SPACE CO INC |               |
| BOX 516                        |               | P O BOX 3504                       |               |
| ST LOUIS MO 63166-0516         |               | SUNNYVALE CA 94088                 |               |
| ATTN TECHNICAL LIBRARY         | 1             | ATTN K C LEE                       | 1             |
| UNITED TECHNOLOGIES            |               | AEROTHERM CORP                     |               |
| NORDEN SYSTEMS                 |               | 580 CLYDE AVE                      |               |
| NORWALK CT 06856               |               | MOUNTAIN VIEW CA 94043             |               |

**DISTRIBUTION (Continued)**

|  | <u>Copies</u> |  | <u>Copies</u> |
|--|---------------|--|---------------|
| ATTN TECH LIBRARY<br>FMC NAVAL SYSTEMS DIV<br>4800 E RIVER ROAD<br>MINNEAPOLIS MN 55421-1402                     | 1             | ATTN TECHNICAL LIBRARY<br>OAYNE AERONAUTICAL<br>2701 HARBOR DRIVE<br>SAN DIEGO CA 92138                            | 1             |
| ATTN JAMES SORENSON<br>VINCENT ALLEN<br>ORBITAL SCIENCES<br>3380 SOUTH PRICE ROAD<br>CHANDLER AZ 85248           | 1<br>1        | ATTN BRIAN EST<br>THE BOEING COMPANY<br>P O BOX 516<br>ST LOUIS MO 63166-0516                                      | 1             |
| ATTN RON EFROMSON<br>MIT LINCOLN LABORATORY<br>244 WOOD STREET<br>LEXINGTON MA 02173-0073                        | 1             | ATTN WILLIAM FACINELLI<br>ALLIED SIGNAL<br>P O BOX 22200<br>MS 1207 3B<br>TEMPE AZ 85285                           | 1             |
| ATTN BRIAN WALKUP<br>ALLIANT TECH SYSTEMS<br>210 STATE ROUTE 956<br>ROCKET CENTER WV 26726-3548                  | 1             | ATTN DR T P SHIVANANDA<br>TRW BMD<br>P O BOX 1310<br>SAN BERNADINO CA 92402-1313                                   | 1             |
| ATTN DR T LIN<br>TRW ELECTRONICS AND DEFENSE SECTOR<br>BLDG 527/RM 706<br>P O BOX 1310<br>SAN BERNADINO CA 92402 | 1             | ATTN T R PEPITONE<br>AEROSPACE TECHNOLOGY INC<br>P O BOX 1809<br>DAHLGREN VA 22448                                 | 1             |
| ATTN G VINCENT<br>SPARTA INC<br>4901 CORPORATE DR<br>HUNTSVILLE AL 35805   | 1             | ATTN ERIC MOORE<br>MAIL STOP MER 24 1281<br>LOCKHEED SANDERS<br>P O BOX 868<br>NASHUA NH 03061                     | 1             |
| ATTN M S MILLER<br>N R WALKER<br>DYNETICS INC<br>P O BOX 5500<br>HUNTSVILLE AL 35814-5050                        | 1<br>1        | ATTN DR BRIAN LANDRUM<br>RI BLDG E33<br>PROPULSION RESEARCH CENTER<br>UNIVERSITY OF ALABAMA<br>HUNTSVILLE AL 35899 | 1             |
| ATTN H A MCELROY<br>GENERAL DEFENSE CORP<br>P O BOX 127<br>RED LION PA 17356                                     | 1             | ATTN JIM ROBERTSON<br>RESEARCH SOUTH INC<br>555 SPARKMAN DRIVE<br>SUITE 818<br>HUNTSVILLE AL 35816-3423            | 1             |
| ATTN ENGINEERING LIBRARY<br>ARMAMENT SYSTEMS DEPT<br>GENERAL ELECTRIC CO<br>BURLINGTON VT 05401                  | 1             | ATTN BOB WHYTE<br>ARROW TECH ASSOCIATES INC<br>1233 SHELBURNE ROAD D8<br>SO BURLINGTON VT 05403                    | 1             |

**DISTRIBUTION (Continued)**

|   | <u>Copies</u> |   | <u>Copies</u> |
|---|---------------|---|---------------|
| ATTN JUAN AMENABAR<br>SAIC<br>4001 NORTH FAIRFAX DRIVE STE 800<br>ARLINGTON VA 22209                        | 1             | ATTN DONALD MOORE<br>NICHOLS RESEARCH CORPORATION<br>4040 SOUTH MEMORIAL PARKWAY<br>P O BOX 400002<br>MS 920C<br>HUNTSVILLE AL 35815-1502 | 1             |
| ATTN DR KIRIT PATEL<br>SVERDRUP TECHNOLOGY INC<br>TEAS GROUP<br>BLDG 260 P O BOX 1935<br>EGLIN AFB FL 32542 | 1             | ATTN NANCY SWINFORD<br>LOCKHEED MARTIN MISSILES AND<br>SPACE CO<br>P O BOX 3504<br>ORG E5-40 BLDG 1575E<br>SUNNYVALE CA 94088-3504        | 1             |
| ATTN FRANK LANGHAM<br>MICRO CRAFT TECHNOLOGY<br>740 4TH ST<br>MS 6001<br>ARNOLD AFB TN 37389                | 1             | ATTN DAVID RESSLER<br>TRW BALLISTIC MISSILES DIV<br>MS 953 2420<br>P O BOX 1310<br>SAN BERNARDINO CA 92402                                | 1             |
| ATTN LAURA AYERS<br>DELTA RESEARCH INC<br>315 WYNN DRIVE<br>SUITE 1<br>HUNTSVILLE AL 35805                  | 1             | ATTN LEROY M HAIR<br>COLEMAN RESEARCH CORP<br>6820 MOQUIN DRIVE<br>HUNTSVILLE AL 35806  | 1             |
| ATTN BRIAN BENNETT<br>MCDONNELL DOUGLAS<br>MC 064 2905<br>P O BOX 516<br>ST LOUIS MO 63166-0516             | 1             | ATTN SCOTT ALLEN<br>ALLEN AERO RESEARCH<br>431 E SUNNY HILLS RD<br>FULLERTON CA 92635   | 1             |
| ATTN THOMAS FARISS<br>LOCKHEED SANDERS<br>P O BOX 868<br>MER24 1206<br>NASHUA NH 03061-0868                 | 1             | ATTN DARRYL HALL<br>SAIC<br>1100 FIRST AVENUE<br>SUITE 300<br>KING OF PRUSSIA PA 19406  | 1             |
| ATTN JEFFREY HUTH<br>KAMAN SCIENCES CORPORATION<br>2560 HUNTINGTON AVE<br>ALEXANDRIA VA 22303               | 1             | ATTN BARRY LINDBLOM<br>ALLIANT DEFENSE ELECTRONICS<br>SYSTEMS INC<br>P O BOX 4648<br>CLEARWATER FL 34618                                  | 1             |
| ATTN WILLIAM JOLLY<br>KAMAN SCIENCES<br>600 BLVD SOUTH SUITE 208<br>HUNTSVILLE AL 35802                     | 1             | ATTN DR SHIN CHEN<br>THE AEROSPACE CORP<br>M4 964<br>P O BOX 92957<br>LOS ANGELES CA 90009  | 1             |
| ATTN STEPHEN MALLETTE<br>KBM ENTERPRISES<br>15980 CHANEY THOMPSON RD<br>HUNTSVILLE AL 35803                 | 1             |   |               |

## DISTRIBUTION (Continued)

|  | <u>Copies</u> |  | <u>Copies</u> |
|--|---------------|--|---------------|
| ATTN EUGENE HART<br>SYSTEM PLANNING CORP<br>1000 WILSON BLVD<br>ARLINGTON VA 22209-2957  | 1             | ATTN JOHN BURKHALTER<br>AUBURN UNIVERSITY<br>211 AEROSPACE ENGR BLDG<br>AUBURN UNIVERSITY AL 36849                           | 1             |
| ATTN ELAINE POLHEMUS<br>ROCKWELL AUTONETICS & MISSILE<br>SYSTEMS DIVISION<br>D611 DL21<br>1800 SATELLITE BLVD<br>DULUTH GA 30136 | 1             | ATTN DR MAX PLATZER<br>NAVAL POSTGRADUATE SCHOOL<br>DEPT OF AERONAUTICS &<br>ASTRONAUTICS<br>CODE AA PL<br>MONTEREY CA 93943 | 1             |
| ATTN MICHAEL GLENN<br>TASC<br>1992 LEWIS TURNER BLVD<br>FT WALTON BEACH FL 32547   | 1             | ATTN MIKE DANGELO<br>MIT LINCOLN LABORATORY<br>1745 JEFFERSON DAVIS HWY 1100<br>ARLINGTON VA 22202                           | 1             |
| ATTN STEVEN MARTIN<br>SYSTEMS ENGINEERING GROUP INC<br>9841 BROKEN LAND PARKWAY<br>SUITE 214<br>COLUMBIA MD 21046-1120           | 1             | ATTN RICHARD HAMMER<br>JOHNS HOPKINS APPLIED PHYSICS LAB<br>JOHNS HOPKINS ROAD<br>LAUREL MD 20723-6099                       | 1             |
| ATTN C W GIBKE<br>LOCKHEED MARTIN VOUGHT SYSTEMS<br>MS SP 72<br>P O BOX 650003<br>DALLAS TX 75265-0003                           | 1             | ATTN STEVE MULLINS<br>SIMULATION AND ENGINEERING CO INC<br>4935 CENTURY ST NW<br>HUNTSVILLE AL 35816-1901                    | 1             |
| ATTN CHRIS HUGHES<br>EDO GOVERNMENT SYSTEMS DIV<br>1500 NEW HORIZONS BLVD<br>AMITYVILLE NY 11701-1130                            | 1             | ATTN ROBERT BRAENDLEIU<br>KAISER MARQUARDT<br>16555 SATICOY ST<br>VAN NUYS CA 91406-1739                                     | 1             |
| ATTN DANIEL LESIEUTRE<br>NIELSEN ENGINEERING & RES INC<br>526 CLYDE AVENUE<br>MOUNTAIN VIEW CA 94043-2212                        | 1             | ATTN LAWRENCE FINK<br>BOEING AIRCRAFT AND MISSILES<br>P O BOX 3707 MC 4A 36<br>SEATTLE WA 98124-2207                         | 1             |
| ATTN THOMAS LOPEZ<br>COLEMAN RESEARCH CORP<br>990 EXPLORER BLVD<br>HUNTSVILLE AL 35806   | 1             | ATTN ROY KLINE<br>KLINE ENGINEERING CO INC<br>27 FREDON GREENDELL RD<br>NEWTON NJ 07860-5213                                 | 1             |
| ATTN JENNIE FOX<br>LOCKHEED MARTIN VOUGHT SYSTEMS<br>P O BOX 650003<br>MS EM 55<br>DALLAS TX 75265-0003                          | 1             | ATTN THOMAS KLAUSE<br>TRW<br>P O BOX 80810<br>ALBUQUERQUE NM 87198   | 1             |

## DISTRIBUTION (Continued)

|  | <u>Copies</u> |   | <u>Copies</u> |
|--|---------------|---|---------------|
| ATTN DAN PLATUS<br>THE AEROSPACE CORPORATION<br>P O BOX 92957<br>LOS ANGELES CA 90009  | 1             | ATTN BRENT APPLEBY<br>DRAPER LABORATORY<br>555 TECHNOLOGY SQ MS77<br>CAMBRIDGE MA 02139   | 1             |
| ATTN DR REX CHAMBERLAIN<br>TETRA RESEARCH CORPORATION<br>2610 SPICEWOOD TR<br>HUNTSVILLE AL 35811-2604                           | 1             | ATTN JAMES JONES<br>SPARTA INC<br>1901 N FORT MYER DR SUITE 600<br>ARLINGTON VA 22209   | 1             |
| ATTN PERRY PETERSEN<br>NORTHROP GRUMMAN CORP<br>DEPT 9B51 MAIL ZONE XA<br>8900 EAST WASHINGTON BLVD<br>PICO RIVERA CA 90660-3783 | 1             | ATTN SCOTT HOUSER<br>PHOENIX INTEGRATION<br>1872 PRATT DRIVE SUITE 1835<br>BLACKSBURG VA 24060  | 1             |
| ATTN DR JAMES HAUSER<br>AERO SPECTRA INC<br>2850 KENYON CIRCLE<br>P O BOX 3006<br>BOULDER CO 80307                               | 1             | ATTN S ROM MURTY<br>TELEDYNE BROWN ENGINEERING<br>MS 200<br>300 SPARKMAN DRIVE<br>HUNTSVILLE AL 35807                                 | 1             |
| ATTN DARRELL AUSERMAN<br>TRW SPACE AND DEFENSE<br>ONE SPACE PARK<br>MAIL STATION R1-1062<br>REDONDO BEACH CA 90278-1071          | 1             | ATTN STUART COULTER<br>SVERDRUP TECHNOLOGY<br>673 2ND ST MS4001<br>ARNOLD AIR FORCE BASE<br>TULLAHOMA TN 37389-4001                   | 1             |
| ATTN JAY EBERSOHL<br>ADVATECH PACIFIC INC<br>2015 PARK AVENUE SUITE 8<br>REDLANDS CA 92373                                       | 1             | ATTN DR RICHARD HOWARD<br>NAVAL POSTGRADUATE SCHOOL<br>DEPT OF AERONAUTICS AND<br>ASTRONAUTICS<br>CODE AA HO NPS<br>MONTEREY CA 93943 | 1             |
| ATTN PAUL WILDE<br>ACTA INC<br>2790 SKYPARK DR SUITE 310<br>TORRANCE CA 90505-5345   | 1             | ATTN J BRENT RUMINE<br>MIT LINCOLN LABORATORY<br>244 WOOD STREET<br>BUILDING S ROOM 52-327<br>LEXINGTON MA 02173-9185                 | 1             |
| ATTN DR MICHAEL HOLDEN<br>CALSPAN UB RESEARCH CENTER<br>P O BOX 400<br>BUFFALO NY 14225  | 1             | ATTN ANDY MOORE<br>SVERFRUP TECHNOLOGY INC<br>AEDC GROUP<br>740 FOURTH ST<br>MS 6001<br>ARNOLD AFB TN 37389-6001                      | 1             |
| ATTN RICHARD GRABOW<br>SPACE VECTOR CORP<br>17330 BROOKHURST ST SUITE 150<br>FOUNTAIN VALLEY CA 92708                            | 1             |   |               |

**DISTRIBUTION (Continued)**

|   | <u>Copies</u> |   | <u>Copies</u> |
|---|---------------|---|---------------|
| ATTN MICHAEL A GLENN<br>TASC<br>1992 LEWIS TURNER BLVD<br>FORT WALTON BEACH FL 32547-1255                               | 1             | ATTN JAMES W JOBE<br>THE BOEING COMPANY<br>BOEING INFORMATION DEFENSE AND<br>SPACE SYSTEMS<br>20403 68TH AVE SO MS 8Y 69<br>KENT WA 98032 | 1             |
| ATTN CARLOS RUIZ (MP 135)<br>LOCKHEED MARTIN ELECTRONICS<br>AND MISSILES<br>5600 SAND LAKE RD<br>ORLANDO FL 32819-8907  | 1             | ATTN BRIAN K BENNETT<br>BOEING<br>MAIL CODE 5221 1350<br>P O BOX 516<br>ST LOUIS MO 63166   | 1             |
| ATTN ERIC GRABOW<br>SPACE VECTOR CORPORATION<br>9223 DEERING AAVE<br>CHATSWORTH CA 91311                                | 1             | ATTN DARRELL E GILLETTE<br>COALESCENT TECHNOLOGIES CORP<br>7061 UNIVERSITY BLVD<br>WINTER PARK FL 32792                                   | 1             |
| ATTN S R MURTY<br>TELEDYNE BROWN ENGINEERING<br>MS 200<br>300 SPARKMAN DRIVE<br>HUNTSVILLE AL 35807                     | 1             | ATTN SAL MICELI<br>LOCKHEED MARTIN ASTRONAUTICS<br>P O BOX 179<br>DENVER CO 80201   | 1             |
| ATTN STEVE JOHNSON<br>DELTA RESEARCH INC<br>315 WYNN DR SUITE 1<br>HUNTSVILLE AL 35805                                  | 1             | ATTN MINH DANG<br>ITT SYSTEMS AND SCIENCES CORP<br>600 BOULEVARD SO SUITE 208<br>HUNTSVILLE AL 35802-2104                                 | 1             |
| ATTN EDWARD ZABRENSKY<br>TRW<br>MAIL CODE SBGA 971<br>P O BOX 1310<br>SAN BERNARDINO CA 92402                           | 1             | ATTN FRANCIS J PRIOLO<br>ANSER<br>DEFENSE SYSTEMS DIVISION<br>1215 JEFF DAVIS HWY SUITE 800<br>ARLINGTON VA 22202-3251                    | 1             |
| ATTN CARMEN J PEZZONE JR<br>SYSTEMS ENGINEERING GROUP INC<br>9861 BROKEN LAND PARKWAY<br>SUITE 350<br>COLUMBIA MD 21046 | 1             | ATTN KENNETH V CHAVEZ<br>SANDIA NATIONAL LAB<br>P O BOX 5800<br>ALBUQUERQUE NM 87185-0825   | 1             |
| ATTN GORDON S SCHMIDT<br>LOCKHEED MARTIN TACTICAL<br>DEFENSE SYSTEMS<br>1210 MASSILLON RD<br>AKRON OH 44315-0001        | 1             | ATTN MARK A JANTSCHER<br>ALLIANT TECH SYSTEMS INC<br>600 2ND ST NE<br>MAIL STATION MN11 2626<br>HOPKINS MN 55343                          | 1             |
| ATTN DANIEL B CORBETT<br>DELTA RESEARCH INC<br>315 WYNN DR SUITE 1<br>HUNTSVILLE AL 35805                               | 1             | ATTN DR DANNY LIU<br>ZONA TECHNOLOGY INC<br>7430 E STETSON DR STE 205<br>SCOTTSDALE AZ 85251  | 1             |

**DISTRIBUTION (Continued)**

|  | <u>Copies</u> |   | <u>Copies</u> |
|--|---------------|---|---------------|
| ATTN LES WIGGINS<br>THE BOEING COMPANY<br>499 BOEING BLVD MS JN 67<br>P O BOX 240002<br>HUNTSVILLE AL 35824-6402             | 1             | ATTN KEITH ODELL<br>THIOKOL<br>MS 251<br>P O BOX 707<br>BRUGGAM CITY NT 84302-0707  | 1             |
| ATTN KENNETH M ELLIOT III<br>APPLIED ORDNANCE TECHNOLOGY INC<br>P O BOX 899<br>5254 POTOMAC DRIVE STE E<br>DAHLGREN VA 22448 | 1             | ATTN PAUL D THORNLEY<br>ITT INDUSTRIES SYSTEMS DIV<br>P O BOX 15012<br>COLORADO SPRINGS, CO 80935-5012                      | 1             |
| ATTN DARRELL GILLETTE<br>MICHAEL CEBULA<br>COALESCENT TECHNOLOGIES<br>10640 CHARLES CIRCLE<br>CYPRESS CA 90630               | 1<br>1        | ATTN NICHOLAUS BONAFEDE<br>NORTHROP GRUMMAN RYAN<br>AERONAUTICAL CENTER<br>P O BOX 85311<br>SAN DIEGO CA 92186-5311         | 1             |
| ATTN DR RICHARD KROEGER<br>NICHOLS RESEARCH<br>4040 SOUTH MEMORIAL PARKWAY<br>MAIL STOP 912<br>HUNTSVILLE AL 35802           | 1             | ATTN KARL L BRUNSON<br>SAIC SCIENCE APPLICATIONS<br>INTERNATIONAL CORP<br>1901 N FORT MYER DR STE 301<br>ARLINGTON VA 22209 | 1             |
| ATTN DAVID REINBOLD<br>ORBITAL SCIENCES CORP<br>3380 S PRICE RD<br>CHANDLER AZ 85248   | 1             | ATTN JAMES Q TALLEY<br>GENERAL DYNAMICS ARMAMENT SYS<br>LAKESIDE AVE ROOM 1305<br>BURLINGTON VT 05401                       | 1             |
| ATTN RALPH H KLESTADT<br>RAYTHEON MISSILE SYSTEMS<br>P O BOX 11337<br>BLDG 801 MS C6<br>TUCSON AZ 85739-1337                 | 1             | ATTN DANIEL SHEDD<br>SCIENCE APPLICATIONS INTL<br>1710 GOODRIDGE DR MS 188<br>MCLEAN VA 22102                               | 1             |
| ATTN RONALD W GREEN<br>SANDIA NATIONAL LAB<br>P O BOX 5800<br>MS 0303<br>ALBUQUERQUE NM 87185-0303                           | 1             | ATTN SEAN GEORGE<br>CHARLES S DRAPER LAB<br>555 TECHNOLOGY SQUARE<br>MS 23<br>CAMBRIDGE MA 02139                            | 1             |
| ATTN WAYNE HATAWAY<br>ARROW TECH ASSOCIATES<br>1233 SHELBURNE RD SUITE D8<br>SOUTH BURLINGTON VT 05403                       | 1             | ATTN DARK T EDQUIST<br>APPLIED RESEARCH ASSOC INC<br>5941 S MIDDLEFIELD RD STE 100<br>LITTLETON CO 80123                    | 1             |
|  |               | ATTN KENNETH SCHROEDER<br>COLEMAN AEROSPACE COMPANY<br>7675 MUNICIPAL DR<br>ORLANDO FL 32819                                | 1             |

## DISTRIBUTION (Continued)

|   | <u>Copies</u> |  | <u>Copies</u> |
|---|---------------|--|---------------|
| ATTN GARY DON VINCENT<br>SPARTA INC<br>6000 TECHNOLOGY DR BLDG 3<br>HUNTSVILLE AL 35805-1955                | 1             | ATTN JAHN DYVIK<br>UNITED DEFENSE<br>M170<br>4800 EAST RIVER RD<br>MINNEAPOLIS MN 55421  | 1             |
| ATTN DR JOHN L PORTER<br>SVERDRUP TECHNOLOGY INC<br>P O BOX 1935 BLDG 260<br>EGLIN AFB FL 32542             | 1             | ATTN PROF DOYLE KRUGHT<br>RUTGERS UNIVERSITY<br>DEPT OF MECH AND AERO ENG<br>98 BRETT RD<br>PISCATAWAY NJ 08855  | 1             |
| ATTN STEVE BROWN<br>LOCKHEED MARTIN MISSILE AND<br>FIRE CONTROL<br>9500 GODWIN DRIVE<br>MANASSAS VA 20108   | 1             | ATTN RICHARD A HAMMER<br>JOHNS HOPKINS APPLIED PHYSICS LAB<br>11100 JOHNS HOPKINS RD<br>LAUREL MD 20723-6099   | 1             |
| ATTN AL HASTINGS<br>HASTINGS CHARIOTS<br>6280 SOUTH VALLEY VIEW BLVD<br>UNIT 108<br>LAS VEGAS NV 89118-3814 | 1             | ATTN DR BARTLEY L CARDON<br>MIT LINCOLN UNIVERSITY<br>244 WOOD STREET<br>LEXINGTON MA 02173-9108   | 1             |
| ATTN GERALD SOLOMON<br>PRIMEX TECH WARHEAD SYSTEMS<br>4565 COMMERCIAL DRIVE STE A<br>NICEVILLE FL 32578     | 1             | ATTN DEWEY H HODGES<br>GEORGIA INSTITUTE OF TECH<br>SCHOOL OF AEROSPACE ENGR<br>ATLANTA GA 30332-0150  | 1             |
| ATTN LAWRENCE FINK<br>BOEING<br>P O BOX 3707 MC 4A 45<br>SEATTLE WA 98124-2207                              | 1             | ATTN DR DEAN WILKENING<br>STANFORD UNIV<br>CENTER FOR INTERNATIONAL SECURITY<br>AND COOPERATION<br>ENCINA HALL<br>STANFORD CA 94305-6165               | 1             |
| ATTN KAREN Y EVANS<br>AEROJET<br>1100 WEST HOLLYVALE STREET<br>BLDG 160 1 D8320<br>AZUSA CA 91702           | 1             | ATTN WILLIAM H MASON<br>VIRGINIA TECH<br>DEPT OF AEROSPACE AND OCEAN<br>ENGINEERING<br>MC 0203<br>BLACKSBURG VA 24061-0203                             | 1             |
| ATTN JONATHAN KATZ<br>THIOKOL PROPULSION<br>ELKTON DLV OPERATIONS<br>55 THIOKOL ROAD<br>ELKTON MD 21921     | 1             | <b>NON-DOD ACTIVITIES (EX-CONUS)</b>   |               |
| ATTN JIM HURRELL<br>SAIC<br>14 EAST WASHINGTON STREET<br>ORLANDO FL 32801-2320                              | 1             | ATTN A BOOTH<br>BRITISH AEROSPACE DEFENCE LTD<br>MILITARY AIRCRAFT DIVISION<br>WARTON AERODROME WARTON PRESTON<br>LANCASHIRE PR4 1AX<br>UNITED KINGDOM | 1             |



**DISTRIBUTION (Continued)**

|   | <u>Copies</u> |   | <u>Copies</u> |
|---|---------------|---|---------------|
| ATTN R CAYZAC<br>GIAT INDUSTRIES<br>7 ROUTE DE GUERCY<br>18023 BOURGES CEDEX<br>FRANCE                                      | 1             | ATTN A MICKELLIDES<br>GEC MARCONI<br>DEFENCE SYSTEMS LTD<br>THE GROVE WARREN LANE<br>STANMORE MIDDLESEX<br>UNITED KINGDOM | 1             |
| ATTN MAJ F DE COCK<br>ECOLE ROYALE MILITAIRE<br>30 AV DE LA RENAISSANCE<br>1040 BRUXELLES<br>BELGIUM                        | 1             | ATTN K MOELLER<br>BODENSEEWERK<br>GERAETETECHNIK GMBH<br>POSTFACH 10 11 55<br>88641 UBERLINGEN<br>GERMANY                 | 1             |
| ATTN J EKEROOT<br>BOFORS MISSILES<br>691 80 KARLSKOGA<br>SWEDEN   | 1             | ATTN RIBADEAU DUMAS<br>MATRA DEFENSE<br>37 AV LOUIS BREGUET<br>BP 1<br>78146 VELIZY VILLACOUBLAY CEDEX<br>FRANCE          | 1             |
| ATTN M HARPER BOURNE<br>DEFENCE RESEARCH AGENCY<br>Q134 BUILDING<br>RAE FARNBOROUGH<br>HAMPSHIRE QU14 6TD<br>UNITED KINGDOM | 1             | ATTN R ROGERS<br>DEFENCE RESEARCH AGENCY<br>BLDG 37<br>TUNNEL SITE<br>CLAPHAM BEDS MK 41 6AE<br>UNITED KINGDOM            | 1             |
| ATTN A H HASSELROT<br>FFA<br>P O BOX 11021<br>161 11 BROMMA<br>SWEDEN   | 1             | ATTN S SMITH<br>DEFENCE RESEARCH AGENCY<br>Q134 BUILDING<br>RAE FARNBOROUGH<br>HAMPSHIRE QU14 6TD<br>UNITED KINGDOM       | 1             |
| ATTN B JONSSON<br>DEFENCE MATERIAL ADMINISTRATION<br>MISSILE TECHNOLOGY DIVISION<br>115 88 STOCKHOLM<br>SWEDEN              | 1             | ATTN J SOWA<br>SAAB MISSILES AB<br>581 88 LINKOPING<br>SWEDEN   | 1             |
| ATTN P LEZEAUD<br>DASSAULT AVIATION<br>78 QUAI MARCEL DASSAULT<br>92214 SAINT CLOUD<br>FRANCE                               | 1             | ATTN D SPARROW<br>HUNTING ENGINEERING LTD<br>REDDINGS WOOD<br>AMPTHILL<br>BEDFORDSHIRE MK452HD<br>UNITED KINGDOM          | 1             |
| ATTN J LINDHOUT<br>N L R<br>ANTHONY FOKKERWEG 2<br>1059 CM AMSTERDAM<br>THE NETHERLANDS                                     | 1             |   |               |

## DISTRIBUTION (Continued)

|                                    |   |      |                     | <u>Copies</u> |
|------------------------------------|---|------|---------------------|---------------|
| STUDER                             | 1 |      |                     |               |
| E TECHNOLOGY AND                   |   | B10  | (HSIEH)             | 1             |
| CUREMENT AGENCY                    |   | B51  | (ARMISTEAD)         | 1             |
| MS ANALYSIS AND INFORMATION        |   | B60  | (TECHNICAL LIBRARY) | 3             |
| EMS DIVISION                       |   | C    |                     | 1             |
| ERMUEHLESTRASSE 25                 |   | D    |                     | 1             |
| 3 BERNE                            |   | G    |                     | 1             |
| /ITZERLAND                         |   | G02  |                     | 1             |
|                                    |   | G20  |                     | 1             |
| ATTN J M CHARBONNIER               | 1 | G205 |                     | 1             |
| VON KARMAN INSTITUTE               |   | G21  |                     | 1             |
| 72 CHAUSSEE DE WATERLOO            |   | G21  | (COOK)              | 1             |
| 1640 RHODE SAINT GENESE            |   | G22  |                     | 1             |
| BELGIUM                            |   | G23  |                     | 1             |
|                                    |   | G23  | (BIBEL)             | 1             |
| ATTN P CHAMPIGNY                   | 1 | G23  | (CHISHOLM)          | 1             |
| DIRECTION DE L AERONAUTIQUE        |   | G23  | (GAYLORD)           | 1             |
| ONERA                              |   | G23  | (HANGER)            | 1             |
| 29 AV DE LA DIVISION LECLERC       |   | G23  | (HARDY)             | 1             |
| 92320 CHATILLON SOUS BAGNEUX CEDEX |   | G23  | (HYMER)             | 5             |
| FRANCE                             |   | G23  | (KNISS)             | 1             |
|                                    |   | G23  | (OHLMEYER)          | 1             |
| ATTN DR P HENNIG                   | 1 | G23  | (MALYEVAC)          | 1             |
| DEUTSCHE AEROSPACE (DASA)          |   | G23  | (PHILLIPS)          | 1             |
| VAS 414                            |   | G23  | (ROWLES)            | 1             |
| ABWEHR AND SCHUTZ                  |   | G23  | (WEISEL)            | 1             |
| POSTFACH 801149                    |   | G24  |                     | 1             |
| 8000 MUENCHEN 80                   |   | G24  | (ROBINSON)          | 1             |
| GERMANY                            |   | G24  | (VAVRICK)           | 1             |
|                                    |   | G30  |                     | 1             |
| ATTN PETER CAAP                    | 1 | G305 |                     | 1             |
| HD FLIGHT SYS DEPT                 |   | G31  | (RINKO)             | 1             |
| FAA AERONAUTICAL RESEARCH INST     |   | G32  | (DAY)               | 1             |
| OF SWEDEN                          |   | G33  | (FRAYSSE)           | 1             |
| BOX 11021                          |   | G33  | (LUU)               | 1             |
| BROMMA SWEDEN 16111                |   | G33  | (RINALDI)           | 1             |
|                                    |   | G50  |                     | 1             |
| ATTN DAVE BROWN                    | 1 | G50  | (SOLOMON)           | 1             |
| WEAPON SYSTEMS DIVISION            |   | G60  |                     | 1             |
| AERONAUTICAL AND MARITIME          |   | G70  |                     | 1             |
| RESEARCH LABORATORY                |   | G72  |                     | 1             |
| P O BOX 1500 SALISBURY             |   | G72  | (CHEPREN)           | 1             |
| SOUTH AUSTRALIA 5108               |   | K    |                     | 1             |
|                                    |   | K40  |                     | 1             |
| INTERNAL                           |   | K44  | (SITZMAN)           | 1             |
|                                    |   | N    |                     | 1             |
| B                                  | 1 | N92  | (ROOS)              | 1             |
| B04                                | 1 | T    |                     | 1             |
| B04 (ZIEN)                         | 1 | T13  | (ALEXOPOULOS)       | 1             |
| B05 (STATON)                       | 1 | T13  | (CARSOLA)           | 1             |
| B10                                | 1 | T406 |                     | 1             |